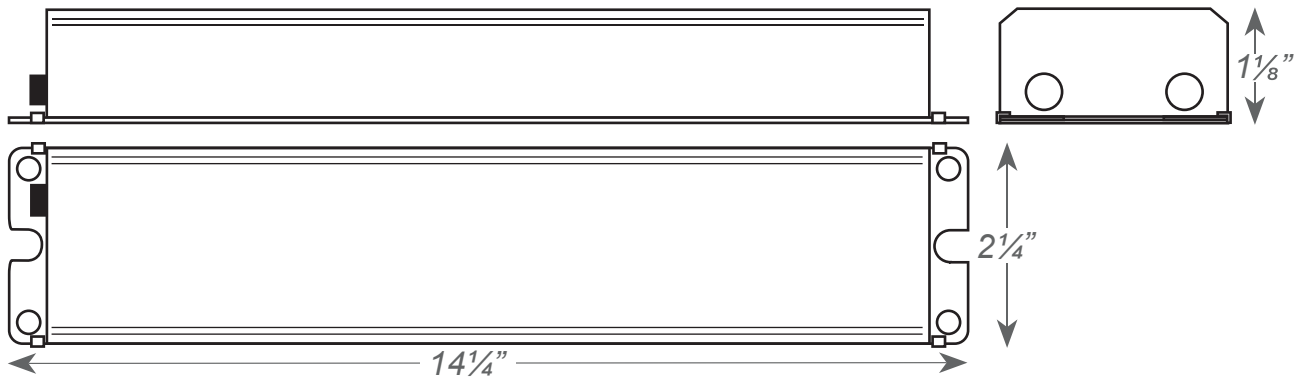


MODEL :	TYPE
PROJECT :	
PREPARED BY :	DATE :

**SERIES SPECIFICATIONS**
**OMX SERIES**

1400 Lumen Low Profile Emergency Fluorescent Ballast 120/277VAC


**LINE DRAWING**

**CONSTRUCTION**
**Housing**

Durable painted steel construction in white finish

**Test Switch**

LED illuminated test switch.

**Time Delay**

Time delay to overcome end of life circuit protection

**ELECTRICAL SPECIFICATIONS**
**Battery Type**

12V Rechargeable Ni-Cad

**Emergency Illumination**

Minimum 90 Minutes

**Battery Recharge Time**

24 Hours

**LED Indicator**

Charge rate/power "ON" and push to test switch

**Frequency**

50/60Hz

**Battery Discharge Time**

1.5 Hours

**Operating Voltage**

120/277

**Operating Temp.**

0°C ~ 50°C

**Output Lumens**

1400 Max.

**Output**

AC Output



APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

## AMPERAGE/WATTAGE

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
OMX1400-LP	3.1	3.1	0.130	0.130

## LAMP COMPATIBILITY

Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.

Operates two 28W T5, one 39W-54W T5HO, two 17W-40W T8 through T12, two 13W-26W 4-pin compact or two 18W-50W 4-pin long compact fluorescent lamps. Refer to lamp compatibility chart for a complete list of lamps.

LAMP	WATTS	INITIAL LUMENS	
		1-Lamp	2-Lamp
T5	28	1250	1300
T5HO	39	1300	n/a
T5HO	54	1350	n/a
T8	17	1050	1200
T8	32	1350	1400

LAMP	WATTS	INITIAL LUMENS	
		1-Lamp	2-Lamp
T12	20	700	800
T12	40	850	900
4-Pin PL CF	13	825	900
4-Pin PL CF	40	850	900

LAMP	WATTS	INITIAL LUMENS	
		1-Lamp	2-Lamp
4-Pin PL CF	26	1000	1100
4-Pin Long CF	18	900	1050
4-Pin Long CF	24	1100	1150
4-Pin Long CF	36	1200	1250
4-Pin Long CF	40	1250	1300

In 2-lamp operation, lumens are equally split between the two lamps

## MOUNTING

Suitable for installation inside, on top or in remote\* of the fixture.

Can be used in both switched and unswitched fixtures

## CERTIFICATIONS/WARRANTY

### Listing

UL Listed for factory or field installation

### Compliance

Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

### Location Rating:

Suitable for damp locations.

### Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

## ORDERING INFORMATION

**Sample Part Number:** OMX1400-LP

OMX	1400	-LP
SERIES	LUMENS	OPTION
OMX	[1400] : 1400 Lumens	[-LP] : Low Profile

## NOTES

\*When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.