



|              |         |
|--------------|---------|
| CONTRACTOR:  |         |
| PROJECT:     | DATE:   |
| PREPARED BY: | MODEL#: |

**DESCRIPTION**



**TATFLL SERIES**

The TATFLL floodlight is a versatile unit with multiple mounting options that satisfy many of your lighting applications. The TATFLL can be adjusted to almost any position to direct the light where needed.



**CONSTRUCTION**

**Housing**

Die cast aluminum housing, with a finned heat sink designed to dissipate heat efficiently.

**Finish**

Durable bronze powder coat paint.

**Thermal Management**

Raised stand-offs provide even heat dissipation; requires no additional heat sinking

**Lens Type**

Clear Pattern polycarbonate Lens

**Mounting**

Yoke mount or knuckle mount

**Listings**


UL listed to US safety standards. Suitable for wet locations.

**Warranty**


5-year limited warranty.

**LINE DRAWING**

15W

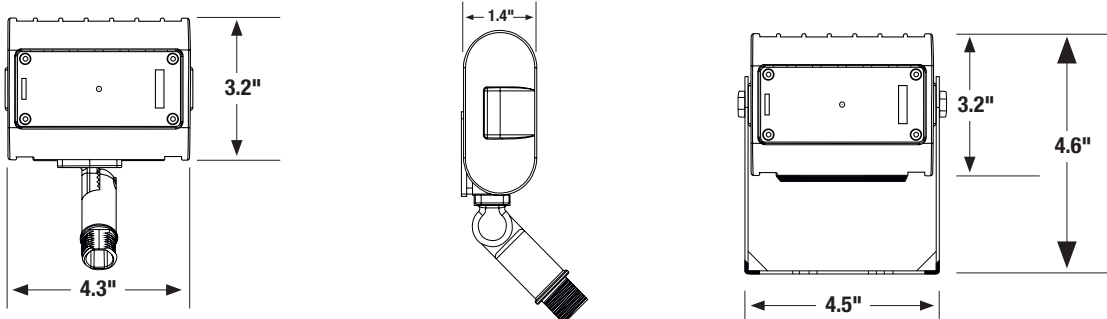

30W

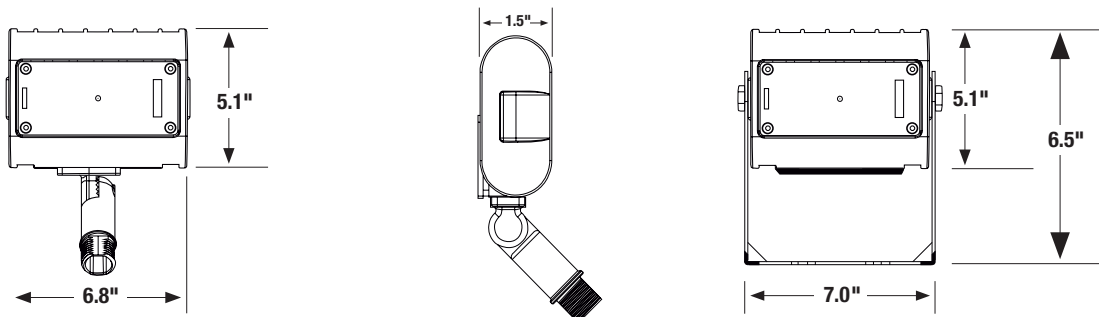


APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



|              |         |
|--------------|---------|
| CONTRACTOR:  |         |
| PROJECT:     | DATE:   |
| PREPARED BY: | MODEL#: |

## LINE DRAWING

50W

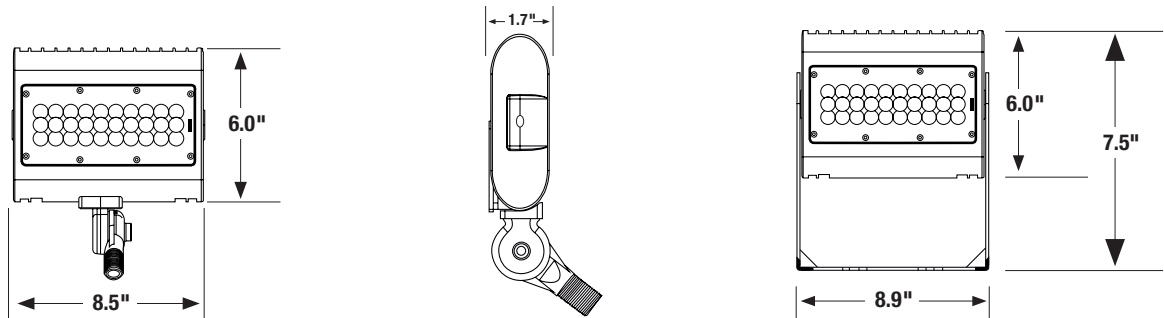

## PERFORMANCE SPECIFICATIONS

|                     | 15W                         | 30W          | 50W        |
|---------------------|-----------------------------|--------------|------------|
| Input Voltage       | 100-277VAC                  | 100-277VAC   | 100-277VAC |
| Frequency           | 50/60Hz                     | 50/60Hz      | 50/60Hz    |
| Input Current       | 0.18A MAX                   | 0.35A MAX    | 0.6A MAX   |
| Input Wattage       | 15W                         | 29.5W        | 48.1W      |
| Power Factor        | >0.90                       | >0.90        | >0.90      |
| Efficacy            | 126 LM/W                    | 133 LM/W     | 132 LM/W   |
| LED Efficacy        | 120 LM/W                    | 120 LM/W     | 120 LM/W   |
| Lumens              | 1863Lm                      | 3973Lm       | 6219Lm     |
| Color Temp          | 5000K                       | 5000K        | 5000K      |
| Lifespan            | 50000Hrs.                   | 50000Hrs.    | 50000Hrs.  |
| CRI                 | >80                         | > 80         | > 80       |
| Beam Angle          | 120 X 90°                   | 120 X 90°    | 120 X 90°  |
| Operating Temp      | -20°C- +40°C                | -20°C- +40°C | 0°C- +40°C |
| Ambient Temperature | -35°C (-31°F) -50°C (122°F) |              |            |
| Driver Efficiency   | 88%                         | 88%          | 88%        |

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



|              |         |
|--------------|---------|
| CONTRACTOR:  |         |
| PROJECT:     | DATE:   |
| PREPARED BY: | MODEL#: |

## ORDERING INFO

EXAMPLE: TATFLL3015BZK

| SERIES | COLOR TEMP.  | LAMP WATTAGE  | FINISH                         | MOUNTING  |
|--------|--------------|---|--------------------------------|---|
| TATFLL | [30] : 3000K | [15] : 15 WATTS<br>[30] : 30 WATTS                    | [BZ] : BRONZE<br>[WH] : WHITE  | [K] : 1/2" KNUCKLE MOUNT                          |
|        | [40] : 4000K | [15] : 15 WATTS<br>[30] : 30 WATTS<br>[50] : 50 WATTS | [BZ] : BRONZE                  | [K] : 1/2" KNUCKLE MOUNT                          |
|        | [50] : 5000K | [15] : 15 WATTS<br>[30] : 30 WATTS<br>[50] : 50 WATTS | [BZ] : BRONZE<br>[WH] : WHITE* | [BLANK] : YOKE MOUNT<br>[K] : 1/2" KNUCKLE MOUNT* |

\* Not Available on 30W @ 5000K