


| | | |
|---------------|--------|------|
| MODEL : | | TYPE |
| PROJECT : | | |
| PREPARED BY : | DATE : | |

SERIES SPECIFICATIONS

Low Profile Fluorescent Emergency Ballast 1400 Lumens



LINE DRAWING

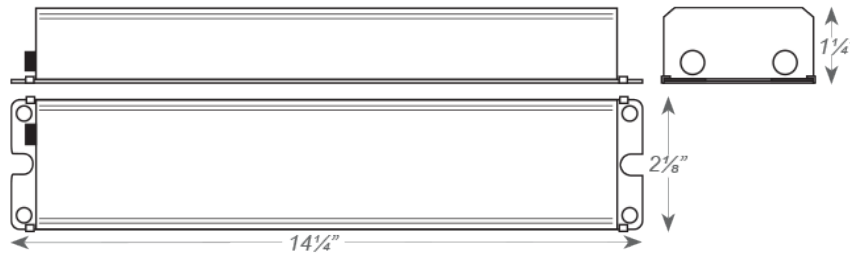

CONSTRUCTION SPECIFICATIONS

Housing Material

Low profile galvanized steel construction

Transfer Switch

Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp(s) for minimum 90-minute emergency illumination.

Lamp Compatibility

Operates two 28W T5, one 39W-54W T5HO, two 17W-40W T8 through T12, two 13W-26W 4-pin compact or two 18W-50W 4-pin long compact fluorescent lamps.

Charger

Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

Operation Time

Operates one or two lamps in the emergency mode for a minimum of 90-minutes.

Compliance Testing

Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing

REMOTE SPECIFICATIONS

Remote Capability

* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

| | | |
|---------------|--------|------|
| MODEL : | | TYPE |
| PROJECT : | | |
| PREPARED BY : | DATE : | |

ELECTRICAL SPECIFICATIONS

Voltage
120/277

Input Wattage (120/277)
3.1/3.1

Input Amperage (120/277)
0.130/0.130

Battery Voltage
12V

MOUNTING SPECIFICATIONS

Mounting Options

Suitable for installation inside, on top or in remote* of the fixture. Can be used in both switched and unswitched fixtures.

CERTIFICATIONS

Listing
UL Listed for damp locations (0°C – 50°C). UL Listed for factory or field installation.

Safety Codes
Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA

ORDERING INFORMATION

Sample Part Number: OMX1400-LP

Dimensions: 14 1/4"x2 1/8"x1 1/4"