



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

INSTALLATION INSTRUCTIONS

WARNING

READ PRIOR TO INSTALLATION.
INSTALLATION SHOULD BE CARRIED OUT BY A CERTIFIED ELECTRICIAN.

- Always turn off power prior to installation or replacement.
- This product must be installed in accordance with the applicable installation codes by a person familiar with the construction and operation of the products and the hazards involved.
- LED Panels are not suitable for using in wet loations.
- Please keep the LED Panel away from any corrosive substance, and please use dry cloth when you clean it.
- Thoroughly inspect fixture for any damage.
- Vapor barrier must be suitable for 90°C
- Suitable for operation in ambient not exceeding 40°C

INSTALLATION INSTRUCTIONS

Model	Input Voltage(V)	Frequecy	Power(W)	Working Current(mA)	PF	THD	Ra	Life Span
TLP22-4030D-DIM2-W	AC100-277V	50/60Hz	40W	1000mA	>0.9	<20%	>80	50,000h
TLP22-4035D-DIM2-W								
TLP22-4040D-DIM2-W								
TLP22-4045D-DIM2-W								
TLP22-4050D-DIM2-W								
TLP22-5030D-DIM2-W	AC100-277V	50/60Hz	50W	1200mA	>0.9	<20%	>80	50,000h
TLP22-5035D-DIM2-W								
TLP22-5040D-DIM2-W								
TLP22-5045D-DIM2-W								
TLP22-5050D-DIM2-W								
TLP14-4030D-DIM2-W	AC100-277V	50/60Hz	40W	1000mA	>0.9	<20%	>80	50,000h
TLP14-4035D-DIM2-W								
TLP14-4040D-DIM2-W								
TLP14-4045D-DIM2-W								
TLP14-4050D-DIM2-W								
TLP24-5030D-DIM2-W	AC100-277V	50/60Hz	50W	1050mA	>0.9	<20%	>80	50,000h
TLP24-5035D-DIM2-W								
TLP24-5040D-DIM2-W								
TLP24-5045D-DIM2-W								
TLP24-5050D-DIM2-W								
TLP24-6030D-DIM2-W	AC100-277V	50/60Hz	60W	1300mA	>0.9	<20%	>80	50,000h
TLP24-6035D-DIM2-W								
TLP24-6040D-DIM2-W								
TLP24-6045D-DIM2-W								
TLP24-6050D-DIM2-W								



APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

660 NW PEACOCK BLVD. | PORT ST. LUCIE, FL 34986 | TEL: 772.879.0178 | TAMLITEUSA.COM




MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

INSTALLATION INSTRUCTIONS


INSTALLATION INSTRUCTIONS

WIRING INSTALLATION


1.Unscrew the driver cover.

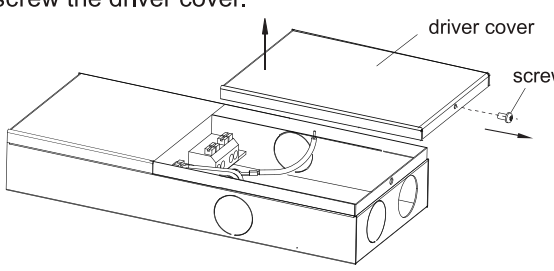


2.Connect the conduit to the driver box.

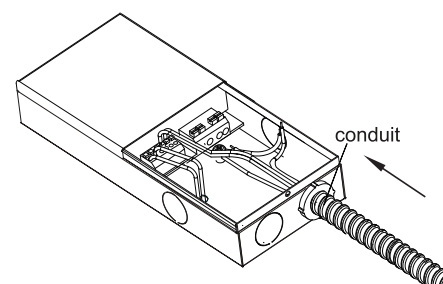

3.Connect other wires separately.

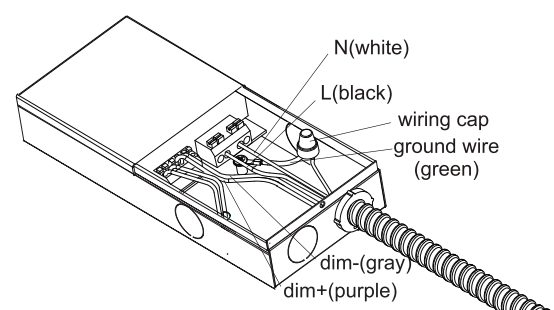


4.Put back the driver cover and fix it by screw.

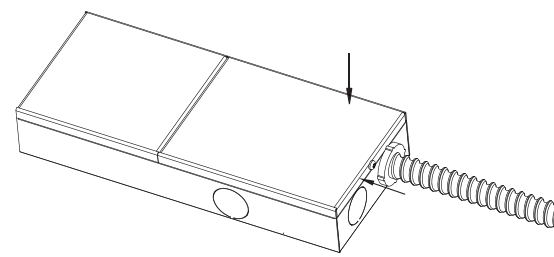


RECESSED INSTALLATION

1.Replace existing lighting fixture from ceiling with LED Panel.

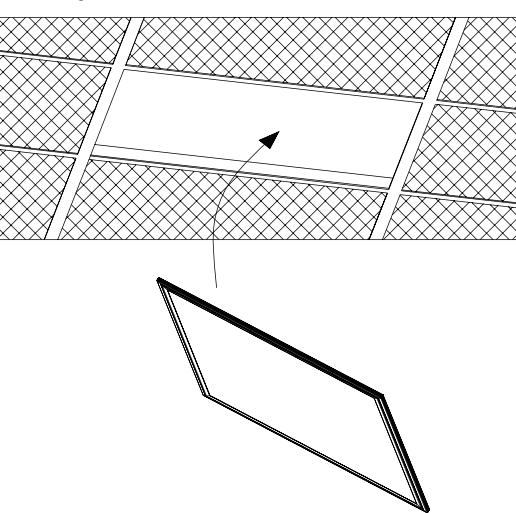

2. Use the protective brackets for safety.

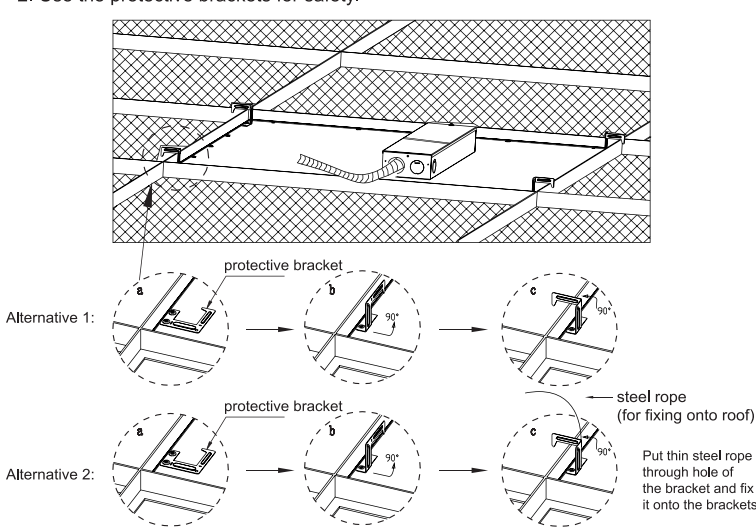



APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

660 NW PEACOCK BLVD. | PORT ST. LUCIE, FL 34986 | TEL: 772.879.0178 | TAMLITEUSA.COM