



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

**DESCRIPTION**



**BOL Series**

**LED Wattage & Color Selectable Bollard**

This attractive bollard fixture is excellent for a wide variety of applications. The dome top is the finishing touch for this modern look and is practical to keep debris and moisture from collecting on top. The wattage & color selectable features add to its versatility.



**FEATURES & SPECIFICATIONS**

**Intended Use**

Walkways, entrance ways, driveways and other small-area lighting applications.

**Finish**

Bronze powder-coat finish

**Construction**

Extruded aluminum housing

**Dimming**

0-10v

**Optics**

Clear polycarbonate lens

**Operating Temperatures**

-40°C~+50°C

**Listings**

UL listed to US safety standards. Wet location listed.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.


(BOLWSCSDBCZ is only model DLC rated)

**Warranty**

5-year limited warranty.

**NOTE:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

**LINE DRAWINGS**

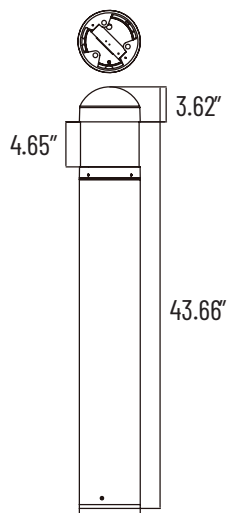



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

**ORDERING INFORMATION**

Example: BOLWSCSDCBZ

SERIES	WATTAGE	COLOR TEMP.	TOP	REFLECTOR	FINISH
BOL	[ WS ] SELECTABLE : 14/19/24W	[ CS ] SELECTABLE : 3K,4K,5K	[ D ] : DOME TOP	[ C ] : CONE REFLECTOR [ L ] : LOUVERED REFLECTOR*	[ BZ ] : BRONZE

\*Non DLC

**LIGHTING SPECIFICATIONS**

SERIES	LUMENS	LPW	WATTAGE	VOLTAGE	CRI
BOLWSCSDCBZ	3250	143	24/19/14	120-277V	70
BOLWSCSDLBZ	1750	78	24/19/14	120-277V	70

**ENVIRONMENTAL SPECIFICATIONS**

Input voltage	120-277V
Frequency range	50-60Hz
Input current	0.27A
THD	≤20
Strobe factor	≤30%
Surge Protection	L-N=4KV



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

**DRIVER INFORMATION**

**ELECTRICAL SPECIFICATIONS**

Type	Non-Isolated
Nominal W	24W
<b>Input</b>	
Input Voltage (VAC)	100-277V
Frequency Range (Hz)	50/60Hz
Power Factor @ Full Load	≥0.90
<b>Output</b>	
Dimming Control 1-10V	100%
Over Voltage Protection	Yes
Over Load Protection	-
Over Temperature protection	No
Output Short-Circuit Protection	Yes

**ACCESSORIES**

**MOUNTING KITS**

- Anchor Bolt Carrier x1
- M10\*8 Nut x12
- M10 Spring Washer x3
- M10 Flat Washer x6
- Anchor Bolt x3
- Hex Wrench x1




APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION





CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

**DIMMING CHART**

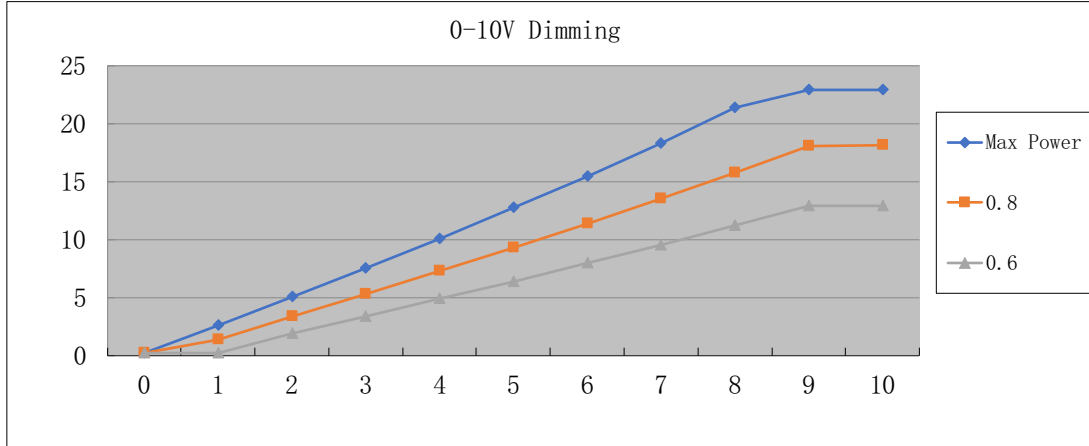

**PHOTOMETRICS**

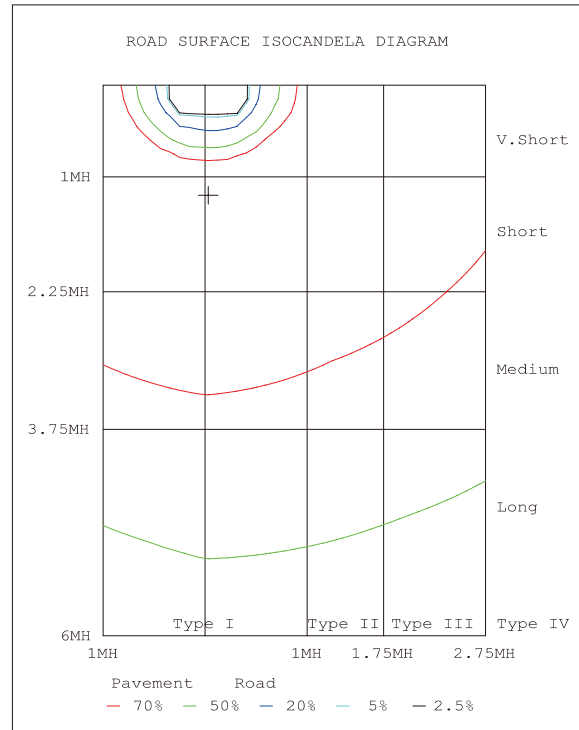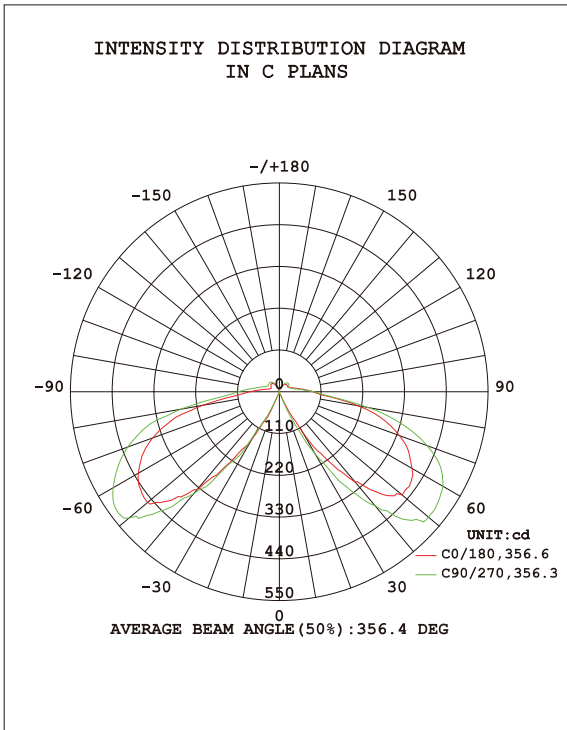

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION