

INSTALLATION INSTRUCTIONS

CANOPY LIGHT FIXTURE

WARNING:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH ALL APPLICABLE INSTALLATION CODES BY A LICENSED ELECTRICIAN.

To avoid the risk of fire, explosion, or electric shock, this product should be installed, inspected, and maintained by a qualified electrician only, in accordance with all applicable electrical codes.

TO AVOID ELECTRIC SHOCK:


- Be certain electrical power is OFF before and during installation and maintenance.
- Luminaire must be connected to a wiring system with an equipment-grounding conductor.

WARNING:


- Make sure the supply voltage is the same as the rated luminaire voltage.
- This fixture is not designed for use with temporary power sources such as generators.
- Do not install where the marked operating temperatures exceed the ignition temperature of the hazardous atmosphere.
- Do not operate in ambient temperatures above those indicated on the luminaire nameplate.
- Keep lens tightly closed when in operation.
- Supply wire must be rated for 90°C minimum.

SURFACE MOUNT WITH JBOX


1. Loosen the screw on the side of the housing and pull out the connecting plate.

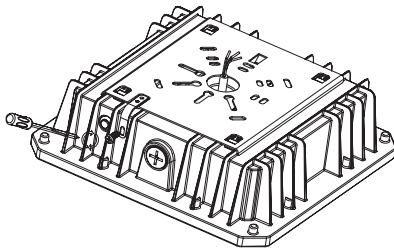


2. Fix the connecting plate onto the ceiling and put the wire through center hole.

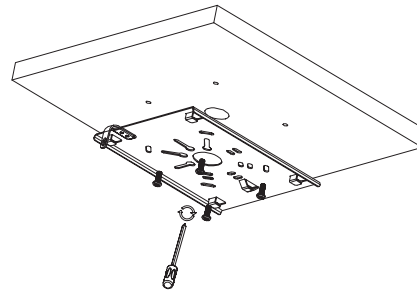


3. If you need to use the surface-mounted installation, a circle of silicone sealant is needed around the edge of the fixed plate.

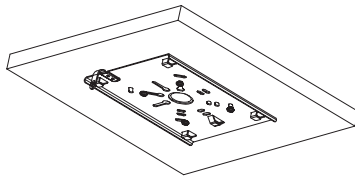

4. Buckle the connecting plate into the clips and connect the wires as shown below. Wire the dimming wires (DIM+/DIM-) if needed. If dimming is not needed cap off leads and secure properly.

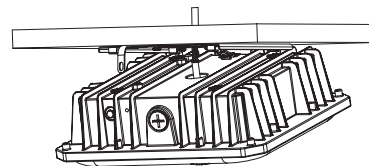


5. Slide fixture back into the connecting plate and fix the screw.

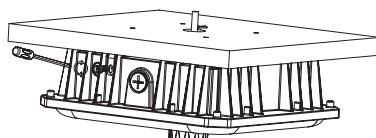


Black	○	Line
White	○	Neutral
Green	○	Ground
Purple	○	Dim +
Pink	○	Dim -

INSTALLATION INSTRUCTIONS

PENDANT INSTALLATION WITH 3/4 INCH CONDUIT


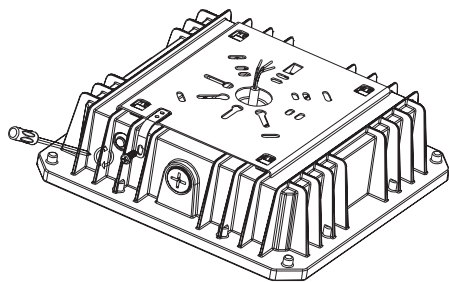


1. Loosen the screw on the side of the housing and pull out the connecting plate.

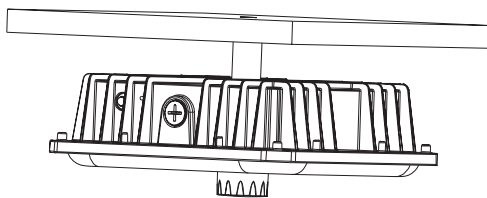

3. Screw the fixture and conduit pole together tightly. Ensure connection is weatherproof.

2. Connect the wires as shown below. PS: Wire the dimming wires (DIM+/DIM-) if needed. If dimming is not needed cap off leads and secure properly.

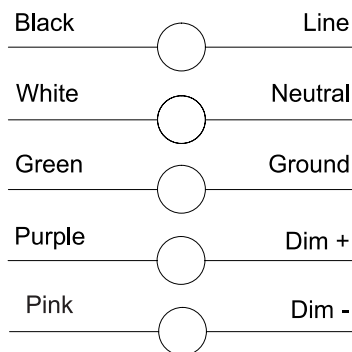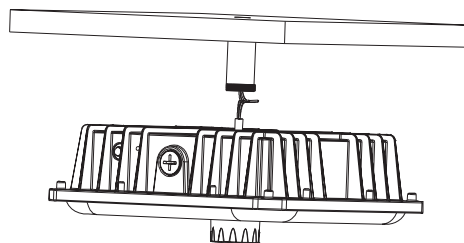

CCT & POWER & PHOTOCELL SELECT GUIDANCE


WARNING:

1. Select desired CCT & Power & Photocell before operation!
2. Coin plug caps must be reinstalled after CCT & Power selection. Ensure caps are tightened and gaskets are present.

SENSOR INSTALLATION:

1. Remove sensor socket cap and install Z10 sensor (sold separately).
 2. Confirm fixture is functional with sensor after install and adjust settings as needed.
- *Sensor remote (sold separately) may be required to adjust settings

DIP Switch for CCT & Watt



DIP Switch for Photocell

