

TAMLITE LIGHTING 660 NW Peacock Blvd. Port St. Lucie, FL 34986 tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

Catalog #:	04/03/2017
Project:	Typo:
Prepared By:	Туре:

HOUSING

Diecast aluminum housing with gray powdercoat finish and integral heat sink and arm flange for surface mounting. 120-277V photocontrol and socket

LENS

Prismatic polycarbonate vandal resistant refractor.

MOUNTING

Mount with integral three hole flange on housing arm, or use 90 degree extension arm (included)

LIGHT OUTPUT PERFORMANCE

TOTAL LUMENS : 4217.7 LUMENS PER WATT : 81.59 COLOR TEMP. : 5000K

CRI: 72.9

DISTRIBUTION: TYPE VS

LIFE: 50000 Hrs

ELECTRICAL DETAILS

INPUT VOLTAGE : 120-277V FREQUENCY : 50/60 Hz INPUT WATTAGE : 52.36 WATTS

POWER FACTOR: .91

120-277V Multivolt photocell included

LISTINGS/RATINGS/COMPLIANCE

UL: Listed Wet Locations

WARRANTY

Guaranteed for 3 years against mechanical defects in manufacturing.

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***

DDLED Series 50W LED Dusk to Dawn Security Light












SPECIFICATIONS / DIMENSIONS

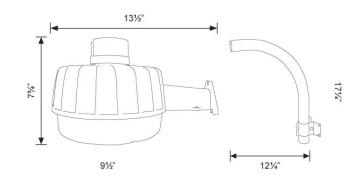

ORDERING INFORMATION

Sample Part Code: DDLED50W

