MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

SPECIFICATIONS — DLF-HA SERIES

4",6", 8" or 10" CFL Horizontal Architectural Housing

LINE DRAWING

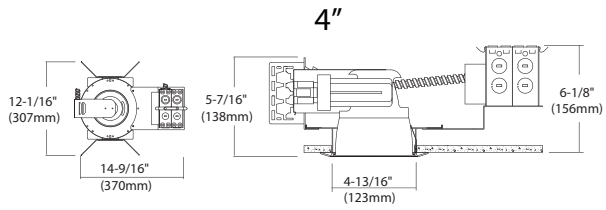

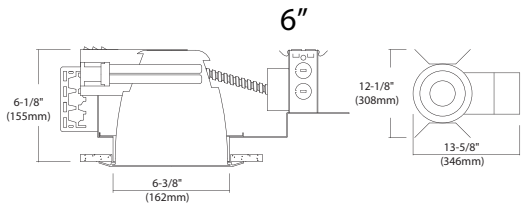

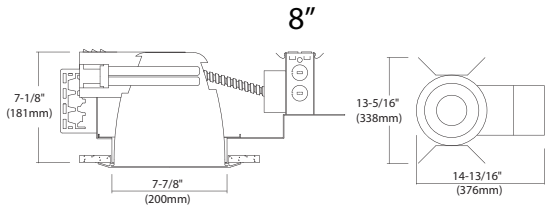

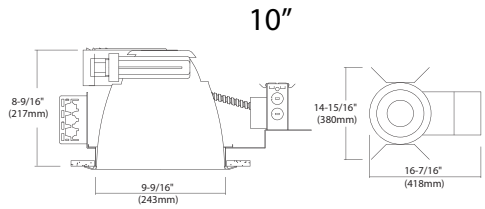

CONSTRUCTION

HOUSING

• Non-IC housing, thermally protected against the misuse of insulation materials and improper lamping
• J-box is listed for through-branch circuit wiring; maximum of 8 #12 AWG 90° C branch circuit conductors (4 in, 4 out)
• Ground wire provided on J-box
• (5) 1/2" knockouts with pry-out slots, and (4) knockouts with Romex cable clamp

MOUNTING

• 20-gauge, 1 5/8"black painted CRS mounting ring allows for use in various thickness of ceilings
• Commercial mounting kit provides up to 5" vertical adjustment, which can be used with 1/2" EMT, optional HB-24 or HBC-24 bar hanger for lathing channels for T-bar grid or concealed spline ceiling.

ELECTRICAL

SOCKET

• 4-Pin base G24Q/GX24Q socket for use with DTT and TTT CFL lamps
• Horizontally mounted galvanized socket plate and lamp holder

LISTINGS/RATINGS

LISTINGS/RATINGS/COMPLIANCE

UL, C-UL listed for damp location
UL, C-UL listed for feed through

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

WARRANTY

WARRANTY

Guaranteed one year from the purchase date of the product, against mechanical defects in manufacturing.

ORDERING INFORMATION

Sample Part Code: DLF8-HA226NE

DLF		HA			
SERIES	SIZE	HOUSING	LAMP WATTAGE	BALLAST OPTION	OPTION
DLF	[4]: 4 Inch* [6]: 6 Inch** [8]: 8 Inch [10]: 10 Inch *4 inch - (1) 13W-26W only ** 6 Inch - (1) 13W-42W and (2) 13W-26W only	[HA]: Horizontal Architectural	[113]: (1) 13W [118]: (1) 18W [126]: (1) 26W [132]: (1) 32W (6, 8 and 10 inch only) [142]: (1) 42W (6, 8 and 10 inch only) [157]: (1) 57W (10 inch only) [213]: (2) 13W (6, 8, 10 inch only) [218]: (2) 18W (6, 8, 10 inch only) [226]: (2) 26W (6, 8, 10 inch only) [232]: (2) 32W (8, 10 inch only) [242]: (2) 42W (8, 10 inch only) [257]: (2) 57W (10 inch only)	[NE]: NPF Electronic (13-26W 120V only) [HE]: HPF Electronic (120/277V) [DIM1]: Mark 10 Dimming (120V) [DIM2]: Mark 10 Dimming (277V) [DIM7]: Mark 7 Dimming (120/277V)	[BLANK]: No Options [EM]: Emergency w/ Switch [Q]: Quick Connectors

ACCESSORIES

ACCESSORIES

- TMFH44, TMFH64, TMFH84, TMFH104 trims available in clear specular or white reflector finishes with white, black, satin nickel, and mocha rings.
- TMFH69, TMFH89 cross blade trims available in clear specular or white reflector finishes with white, black, satin nickel, and mocha rings.
- TMFH66 wall wash trims available in clear specular or white reflector finishes with white, black, satin nickel, and mocha rings.
- TMFH42, TMFH62, TMFH82 shower trims available in fresnel or abalite glass lenses with clear specular or white reflector finishes with white, black, satin nickel, and mocha rings.