



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

## SERIES SPECIFICATIONS

The EXPL series offers exits signs made from natural materials using photoluminescent technologies, removing the need for toxic materials to be used. The photoluminescent materials also means no electricity is needed to power the units, charging in 5FC of natural and fluorescent light.



## LINE DRAWING

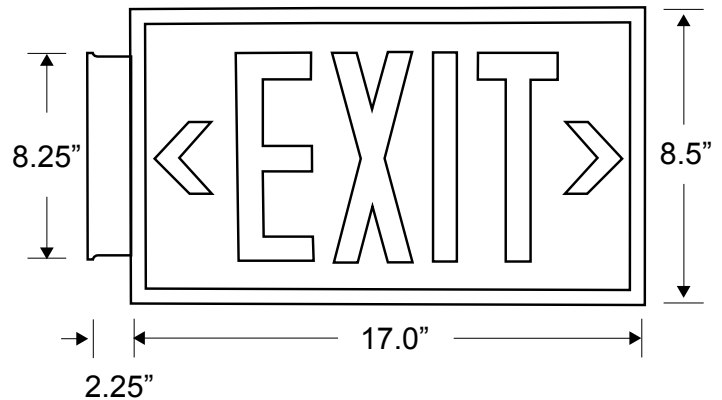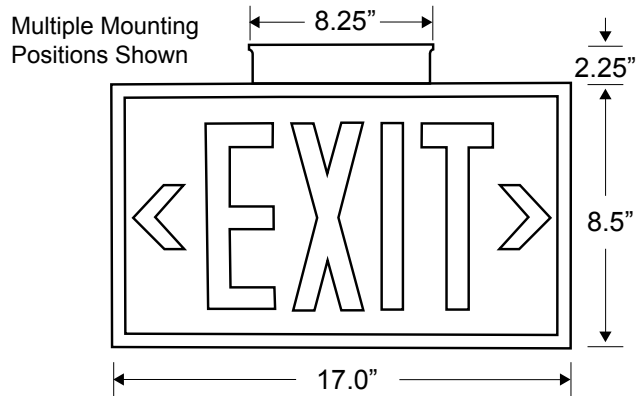

## CONSTRUCTION

### Housing

Polycarbonate face panel/aluminum frame with photoluminescent lettering

### Illumination

High illumination non-electric photoluminescent technology

### Visibility

Visible at 50 feet in Total Blackout

### Viewing distance

50Ft viewing distance

### Materials

Non-Radioactive, Non-Toxic Materials

### Chevrons

Field applied directional chevrons

### Vandal Resistance

Vandal resistant polycarbonate face panel

MODEL :	TYPE
PROJECT :	
PREPARED BY :	DATE :

## ELECTRICAL SPECIFICATIONS

No electrical current required

## MOUNTING SPECIFICATIONS

Designed for surface, flag and ceiling mount with optional frame and mounting bracket  
 Available for both high and low locations

## CERTIFICATIONS/WARRANTY

### Listing

UL 924 listed Emergency Lighting and power equipment listed through ETL.

UL states 5 FC of external light be maintained on the sign face during all times of building occupancy.

### Safety Certifications

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, International building code 2009, International fire code 2009

### Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

## ORDERING INFORMATION

Sample Part Number: EXPL502R

EXPL	50			
SERIES	VIEWING DISTANCE	NO. OF FACES	HOUSING COLOR	FRAME COLOR
EXPL	[50] : 50 Feet	[1] : Single*	[G] : Green	[BLANK] : No Frame
		[2] : Double	[R] : Red	[G] : Green
			[B] : Black	[R] : Red

\*Single faced frame units do not come with mounting bracket. EXPLMB must be purchased separately.