



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

Catalog #:	04/07/2017
Project:	Type:
Prepared By:	

HOUSING

Die cast aluminum housing with durable bronze powdercoat finish and corrosion resistant exterior stainless steel tamper resistant screws.

LENS

Clear tempered flat glass lens

MOUNTING

Optional adjustable knuckle with 1/2" threads for weatherproof box or groundstake mounting, or adjustable yoke for flat surface mounting.

LIGHT OUTPUT PERFORMANCE

Long life, energy saving CREE LEDs, low junction temperature (Tj) for long life, low lumen depreciation

TOTAL LUMENS : 3,845.62
LUMENS PER WATT : 77.68
NUMBER OF LEDES : 20
COLOR TEMP : 4700K
CRI : 72.4
DISTRIBUTION : NEMA Type 7
LIFE : 50000 Hrs

LED's meet LM80 requirements, photometrics available upon request

ELECTRICAL DETAILS

INPUT VOLTAGE : 120-277V
FREQUENCY : 50/60 Hz
INPUT WATTAGE : 49.51
MIN START TEMP : -30 degrees C
POWER FACTOR : .95

LISTINGS/RATINGS/COMPLIANCE

UL and CUL: Listed wet location

WARRANTY

Guaranteed for 5 years against mechanical defects in manufacturing.


*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***

FL20LED Series

LED Flood Light



SPECIFICATIONS / DIMENSIONS

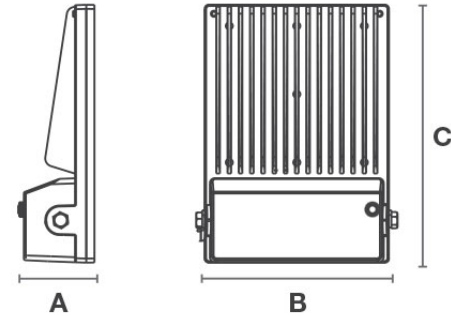

DIMENSIONS	L	W	H
FL20LED	2 3/4 "	7 "	10 "

ORDERING INFORMATION

Sample Part Code: FL20LED47KK

FL20LED	47K	
SERIES	TYPE	MOUNTING

FL20LED

[47K] : Color temp

[K] : 1/2" knuckle
[Y] : Yoke mount