

TAMLITE LIGHTING 660 NW Peacock Blvd. Port St. Lucie, FL 34986 tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

HOUSING

Heavy duty two piece die-cast aluminum housing has a durable white powder coat finish and an adjustable reflector mounting bracket. Junction box has access plate for easy wiring and an adjustable plate with threaded hole for accepting 3/4" hook or down rod that can be repositioned for even weight distribution when installing on sloped ceilings.

REFLECTOR

16" Aluminum reflector with four keyhole slots for easy mounting.

LENS

Standard configuration has no lens Optional acrylic drop lens on 250W PSMH Only Optional flat glass lens on all PSMH models

SOCKET

5KV pulse rated mogul base, with nickel-plated screw shell.

MOUNTING

Mount with included malleable hook or replace hook and mount to ceiling mounted box with down tube and swivel plates (HBSWVLRND or HBSWVLSQ) sold separately, down tube to be provided by others.

SOURCE/WATTAGE

High Pressure Sodium: 250W and 400W Pulse Start Metal Halide: 250W to 400W Optional quartz restrike available, includes timed module, bracket with socket, and 150W quartz lamp.

LISTINGS/RATINGS/COMPLIANCE

CSA or UL Listed

Suitable for dry locations only.


WARRANTY

Guaranteed for one year against mechanical defects in manufacturing.

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***

ORDERING INFORMATION

Sample Part Code: HBPQ400LAL6

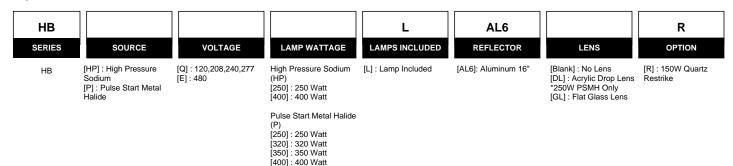

Catalog #: Project:

01/09/2014

Type:

Prepared By:

Project:







Width: 22" Height: 27 1/2"