




MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

SERIES SPECIFICATIONS

The IB series I-Beam LED high bays are ideal for manufacturing, warehousing, commercial and industrial facility lighting applications. The superior design makes it a sturdy, user friendly and easy to install high bay.



LINE DRAWING

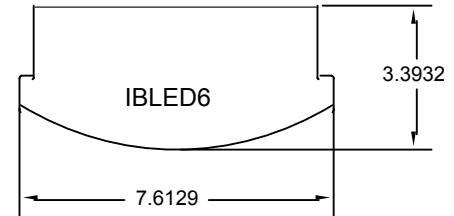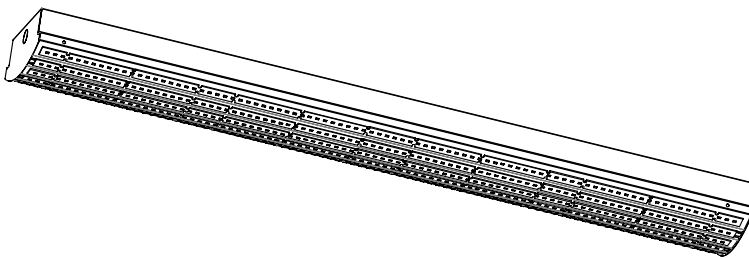

CONSTRUCTION

Housing

The body is constructed of 24 gauge, USA made commercial grade steel with a hot dipped galvanized finish (6 mgs on both sides).

Paint

Paint after fabrication of the galvanized body also means that this fixture is highly resistant to rust over its lifetime.

Lamp Bars

24 gauge, hot dipped galvanized steel

Rockwell Hardness Rating

RB 40 to 65

ELECTRICAL SPECIFICATIONS

Output Power Max

85W (Per Driver)

Line Regulation

< 5%

Load Regulation

< 5%

Typical Voltage @ 55°C @65mA

44.9 (Per Board)

Output Current Ripple

<25% of DC value

Input Voltage

120-277 VAC


MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ELECTRICAL SPECIFICATIONS CONT.

Frequency 50-60Hz	CRI > 80	Color Temp 5000K
Input Current Max .85 @ 120 (Per Driver) .37 @ 277 (Per Driver)	Output Voltage 30V-55VDC @ 2.0A (Per Driver)	THD <20%
Input Wattage Max 93W (Per Driver)	Max. Output Current 2100mA (Per Driver)	Inrush Current 18A Peak @ 120V (Per Driver) 32A Peak @ 277V (Per Driver)
Power Factor ≥ 0.9	Operating Temp -40°C- +85°C	Dimming Low Voltage 0-10V

*Please consult factory for list of approved dimmers

PERFORMANCE SPECIFICATIONS

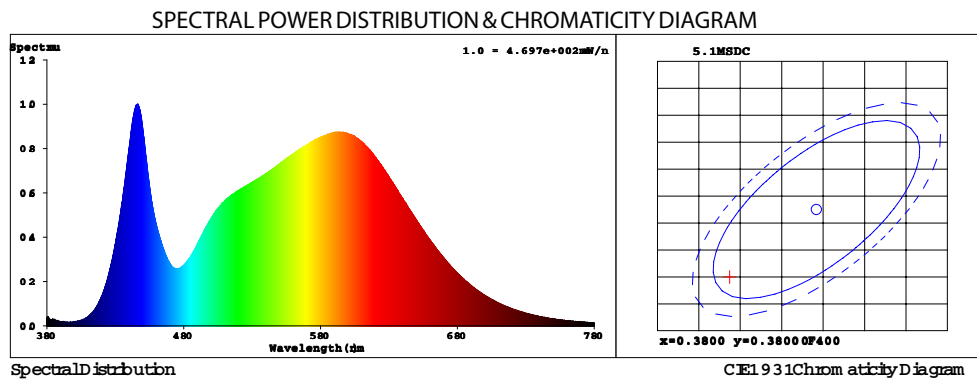

CERTIFICATIONS/WARRANTY

Listing
UL Listed

Location Rating:
Suitable for damp locations

Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

DLC Listing

Fixtures are DLC listed and featured of the Qualified Products List (QPL).**

Assembled in USA

This product has been Assembled in the USA

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

PERFORMANCE SPECIFICATIONS

Target Lumens	Lumens @ 3000K	LPW @ 3000K	Lumens @ 3500K	LPW @ 3500K	Lumens @ 4000K	LPW @ 4000K	Lumens @ 5000K	LPW @ 5000K	Max Wattage	Amps @ 120V	Amps @ 277V
22500	20655	128	20867	129	21834	136	21619	135	161	1.34	0.58
25000	23535	127	25050	129	25081	136	25096	136	185	1.55	0.67
27500	26213	125	26523	126	27656	133	27321	132	209	1.74	0.75
30000	29542	120	29552	120	31116	127	30797	126	246	2.05	0.89

ORDERING INFORMATION

Sample Part Number: IBLED46-32400D3L850

Carton Dimensions: 126.365x20.638x13.97CM
 49.75x8.125x5.5IN

IBLED	4	6		L850
SERIES	LENGTH	No. of BOARDS	TARGET LUMENS & DRIVERS	COLOR TEMP
IBLED	[4] : 4'	[6] : 6 Boards	[225-D2] : 22500 Lumens 2 Drivers	[L850] : 80 CRI 5000K
			[250-D2] : 25000 Lumens 2 Drivers	[L840] : 80 CRI 4000K
			[275-D3] : 27500 Lumens 3 Drivers	[L835] : 80 CRI 3500K
			[300-D3] : 30000 Lumens 3 Drivers	[L830] : 80 CRI 3000K

NOTES

Fixture are not surface mount capable. Consult factory for surface mount bracket options.

**Not all product variations meet Design Light Consortium Qualifications. Please verify that the product is listed on the DLC products list at www.designlightconsortium.org/QPL.

Photometric Data based on 80 CRI 5000K