



Catalog #:	07/14/2016
Project:	Type:
Prepared By:	

## DESCRIPTION

6" IC Air-Tight Remodel Housing  
Line Voltage: 120V - 75W Incandescent

## HOUSING

IC rated air-tight housing, thermally protected against misuse of insulation materials and improper lamping  
J-box is listed for through-branch circuit wiring with (6) 1/2" knockouts, (1) 3/4" knockout and (4) pry-outs Romex cable clamp  
Housing adjusts to accommodate various ceiling thicknesses  
7 1/2" height allows use in 2" x 8" construction  
Ceiling Cutout Size : 6.31"

## SOCKET

Medium base porcelain socket on adjustable mounting bracket for proper lamp positioning

## LISTINGS/RATINGS/COMPLIANCE

UL, C-UL listed for damp location, feed through wiring and direct contact with insulation.

Certified under ASTM-E283 for Airtight Construction

## WARRANTY

Guaranteed one year from the purchase date of the product, against mechanical defects in manufacturing.

## NOTES

Product performance may vary depending on model and end user environment.


\*\*\* SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE\*\*\*

# IC Series

## 6" IC Air-Tight Remodel Housing



## SPECIFICATIONS / DIMENSIONS

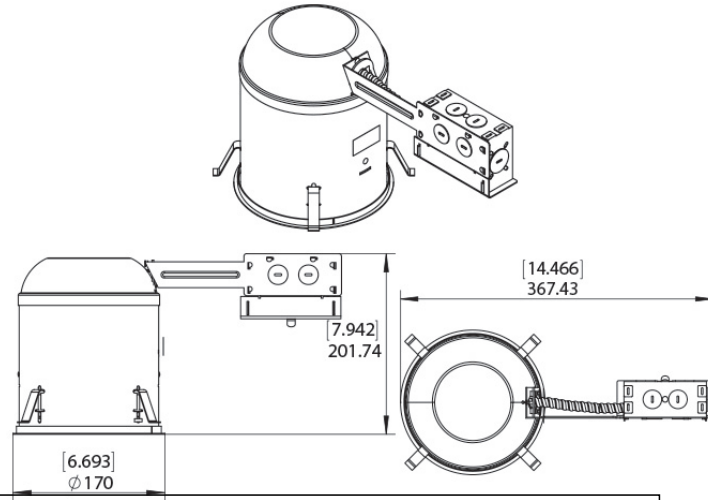

## ORDERING INFORMATION

Sample Part Code: IC206RAT

IC SERIES	CONFIGURATION
IC	[206RAT] : 6" IC Air-Tight Remodel