

# tel: (772) 878-4944 or on the web at www.tamliteusa.com

# SPECIFICATION & FEATURES

Catalog #: Project:	01/06/2014
Project:	Туре:
Prepared By:	

LF Series

16" Large Flood

# HOUSING

Die cast aluminum housing with hinged front frame, corrosion resistant external stainless steel hardware, and bronze powder coat finish.

#### REFLECTOR

Formed aluminum reflector

#### **LENS**

Tempered clear flat glass lens

#### SOCKET

Porcelain 5KV pulse rated mogul base lamp holder with nickel-plated screw shell.

#### **MOUNTING**

Mount with two-piece trunnion bracket (standard).

- Optional adjustable 2 3/8" slipfitter with angle indicators for tenon mounting.
- Optional extruded aluminum arms for fixed position pole mounting (order

LLARM6STSP - 6" square pole arm LLARM10STSP - 10" square pole arm LLARM12STSP - 12" square pole arm LLARM6STRP - 6" round pole arm LLARM10STRP - 10" round pole arm LLARM12STRP - 12" round pole arm

#### SOURCE/WATTAGE

High Pressure Sodium: 150W to 400W Metal Halide: 150W

Pulse Start Metal Halide: 250W to 400W

### LISTINGS/RATINGS/COMPLIANCE

CSA or UL Listed Suitable for wet locations

#### WARRANTY

Guaranteed for one year against mechanical defects in manufacturing

\*\*\* SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE\*\*\*











#### SPECIFICATIONS / DIMENSIONS



# **ORDERING INFORMATION**

Sample Part Code: LFPQ400LSW

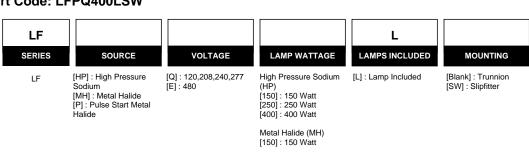

Pulse Start Metal Halide (P) [250] : 250 Watt

[320]: 320 Watt [350]: 350 Watt [400]: 400 Watt