



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

**DESCRIPTION**



**MPFLEDWS SERIES**

The MPFLEDWS is a multi purposed flood that is wattage selectable, durable and compact with powerful LED efficiency.



**FEATURES & SPECIFICATIONS**

**Application**

Multi purposed flood perfect for a wide variety of applications such as landscape lighting, commercial wall washing, pole and area lighting.

**Construction**

Die cast aluminum housing

**Dimming**

0-10v PWM VR

**Optics**

Clear Polycarbonate Optic Plate

**Listings**


UL listed to US and Canadian safety standards. Wet location listed. For use in ambient operating temperatures ranging from 40°C~+40°C.

**Warranty**


5-year limited warranty.

**LINE DRAWINGS**

**Slip fitter**

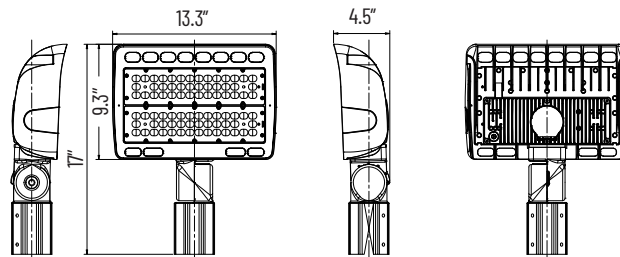

**Trunnion Bracket**

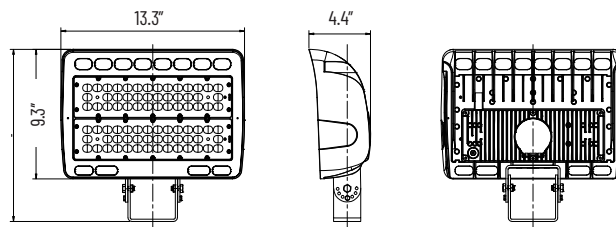



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

**LIGHTING SPECIFICATIONS**



SERIES	LUMENS	LPW	WATTAGE	VOLTAGE	CRI
MPFLEDWS5KTR	20500	144.69	150	100-277V	70
MPFLEDWS5KSF	20500	144.69	150	100-277V	70

**ORDERING INFORMATION**

Example: MPFLEDWS5KSF

SERIES	WATTAGE	COLOR TEMP.	MOUNTING
MPFLED	(WS) SELECTABLE 50W,80W,100,150W	[5K]: 5000K	[SF] : Slip Fitter [TR] : Trunnion Mount


**PHOTOMETRIC REPORTS**

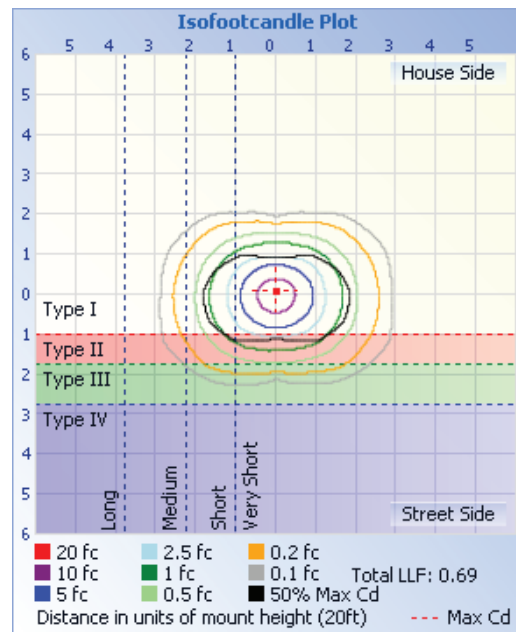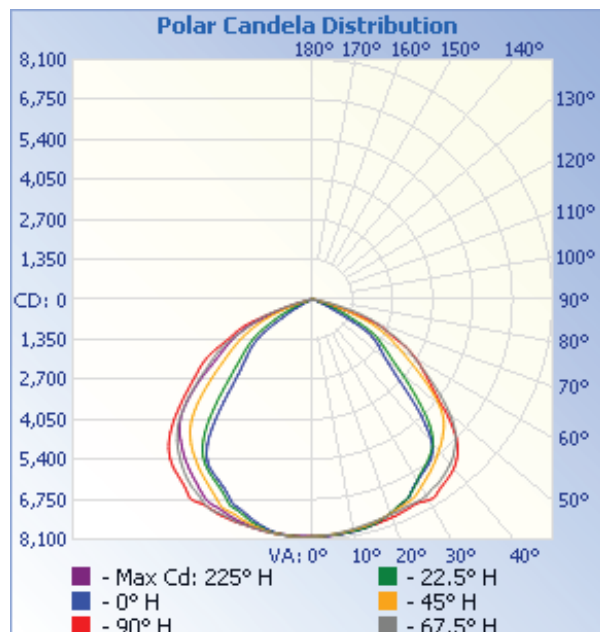



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

**PHOTOMETRIC REPORTS**

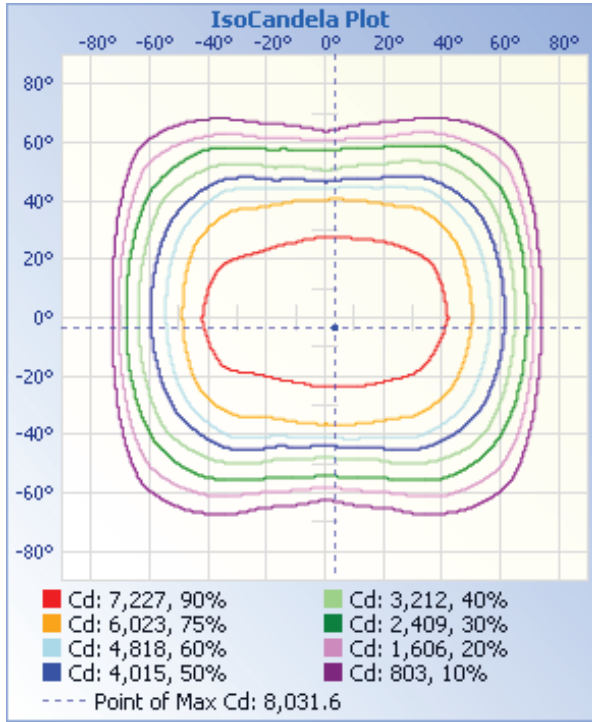

	Center Beam fc	Beam Width	
17.0ft	27.7 fc	34.7 ft	60.1 ft
34.0ft	6.93 fc	69.4 ft	120.2 ft
51.0ft	3.08 fc	104.1 ft	180.3 ft
68.0ft	1.73 fc	138.7 ft	240.4 ft
85.0ft	1.11 fc	173.4 ft	300.5 ft
102.0ft	0.77 fc	208.1 ft	360.6 ft

■ Vert. Spread: 91.1°  
■ Horiz. Spread: 121.0°