

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	


## SERIES SPECIFICATIONS

OMX SERIES

750 Lumen Emergency Fluorescent Ballast 120/277VAC



## LINE DRAWING

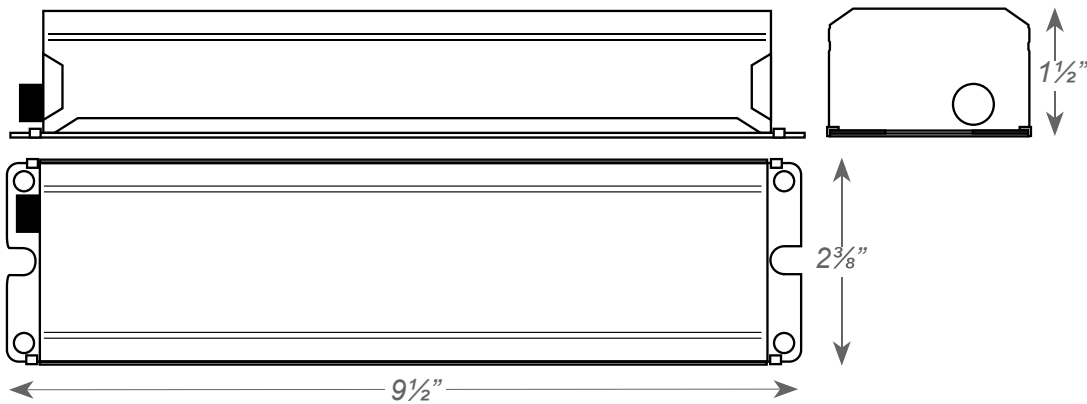

## CONSTRUCTION

### Housing

Durable painted steel construction in white finish with 2' flex conduit

### Test Switch

LED illuminated test switch

## ELECTRICAL SPECIFICATIONS

### Battery Type

3.6V Rechargeable Ni-Cad

### Emergency Illumination

Minimum 90 Minutes

### Battery Recharge Time

24 Hours

### LED Indicator

Charge rate/power "ON" and push to test switch

### Frequency

50/60Hz

### Battery Discharge Time

1.5 Hours

### Operating Voltage

120/277

### Operating Temp.

0°C ~ 50°C

### Output Lumens

750 Max.



APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

660 NW PEACOCK BLVD.

PORT ST. LUCIE, FL 34986

TEL: 772.879.0178

TAMLITEUSA.COM

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

### AMPERAGE/WATTAGE

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
OMX6500	1.8	1.8	0.230	0.230

### LAMP COMPATIBILITY

Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.

Operates one 17W-40W T8 through T12, one or two 18W-26W 4-pin compact or one 18W-40W 4-pin long compact fluorescent lamps. Refer to lamp compatibility chart for a complete list of lamps.

LAMP	WATTS	INITIAL LUMENS	
		1-Lamp	2-lamp
4-Pin PL CF	18	400	550
4-Pin PL CF	26	475	650

LAMP	WATTS	INITIAL LUMENS	
		1-Lamp	2-lamp
4-Pin Long CF	18	550	n/a
4-Pin Long CF	24	600	n/a
4-Pin Long CF	36	650	n/a

In 2-lamp operation, lumens are equally split between the two lamps

### MOUNTING SPECIFICATIONS

Suitable for installation inside, on top or in remote\* of the fixture

Can be used in both switched and unswitched fixtures

### CERTIFICATIONS/WARRANTY

**Listing**  
UL Listed for factory or field installation

**Compliance**  
Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

**Location Rating:**  
Suitable for damp locations.  
Suitable for use in sealed and gasketed fixtures.

**Warranty**  
Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

## ORDERING INFORMATION

Sample Part Number: OMX6500

OMX	6500
SERIES	LUMENS
OMX	[6500] : 750 Lumens

## NOTES

\*When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

