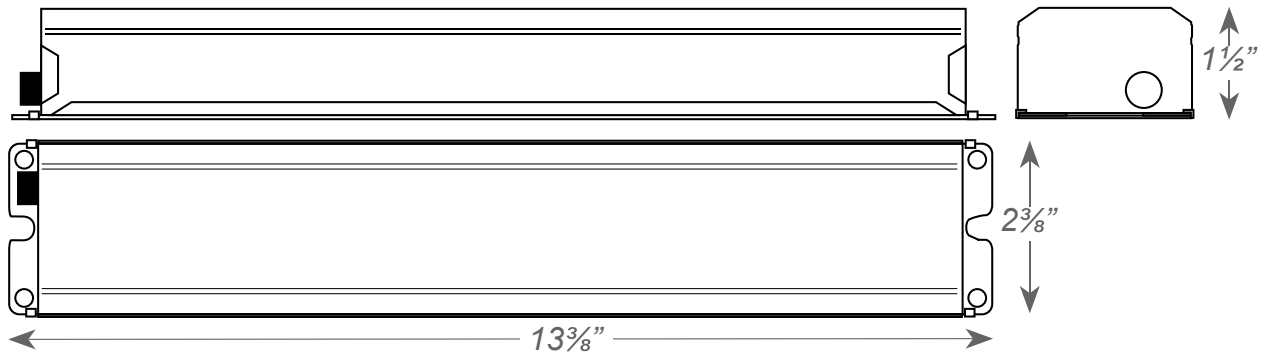


MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

SERIES SPECIFICATIONS
OMX SERIES

1400 Lumen Emergency Fluorescent Ballast 120/277VAC


LINE DRAWING

CONSTRUCTION

Housing
 Durable painted steel construction in white finish

Test Switch
 LED illuminated test switch.

ELECTRICAL SPECIFICATIONS

Battery Type
 6V Rechargeable Ni-Cad

Emergency Illumination
 Minimum 90 Minutes

Battery Recharge Time
 24 Hours

LED Indicator
 Charge rate/power "ON" and push to test switch

Frequency
 50/60Hz

Battery Discharge Time
 1.5 Hours

Operating Voltage
 120/277

Operating Temp.
 0°C ~ 50°C

Output Lumens
 1400 Max.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

AMPERAGE/WATTAGE

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
OMX1400	3.1	3.1	0.270	0.270

LAMP COMPATIBILITY

Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.

Operates two 17W-40W T8, one 30W-110W T12, two 13W-26W, one 13W-42W 4-pin compact, two 18W-36W or one 18W-55W 4-pin long compact fluorescent lamp. Refer to lamp compatibility chart for a complete list of lamps.

LAMP	WATTS	INITIAL LUMENS	
		1-Lamp	2-Lamp
T8	17	1050	1200
T8	32	1350	1400
T12	20	700	800
T12	40	850	900
T12	110	1350	n/a

LAMP	WATTS	INITIAL LUMENS	
		1-Lamp	2-Lamp
4-Pin PL CF	13	825	900
4-Pin PL CF	18	975	1100
4-Pin PL CF	26	1000	1100
4-Pin PL CF	42	1150	n/a

LAMP	WATTS	INITIAL LUMENS	
		1-Lamp	2-Lamp
4-Pin Long CF	18	900	1050
4-Pin Long CF	24	1100	1150
4-Pin Long CF	36	1200	1250
4-Pin Long CF	40	1250	n/a
4-Pin Long CF	50	1250	n/a

In 2-lamp operation, lumens are equally split between the two lamps

MOUNTING

Suitable for installation inside, on top or in remote* of the fixture.

Can be used in both switched and unswitched fixtures

CERTIFICATIONS/WARRANTY

Listing
 UL Listed for factory or field installation

Compliance
 Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Location Rating:
 Suitable for damp locations.

Warranty
 Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Sample Part Number: OMX1400

OMX	1400
SERIES	LUMENS
OMX	[1400] : 1400 Lumens

NOTES

*When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.