

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	


SERIES SPECIFICATIONS

OMX SERIES

700 Lumen Emergency Fluorescent Ballast 120/277VAC with Time Delay



LINE DRAWING

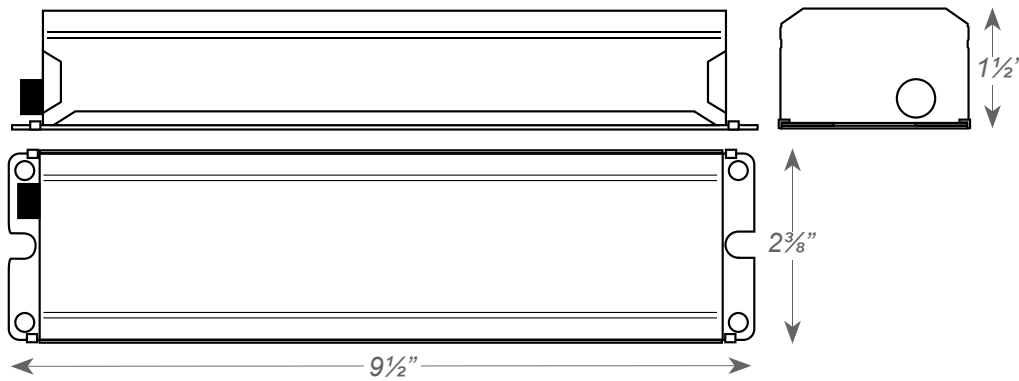

CONSTRUCTION

Housing
Durable painted steel construction in white finish

Test Switch
LED illuminated test switch

Time Delay
Time delay to overcome end of life circuit protection

ELECTRICAL SPECIFICATIONS

Battery Type
3.6V Rechargeable Ni-Cad

Emergency Illumination
Minimum 90 Minutes

Battery Recharge Time
24 Hours

LED Indicator
Charge rate/power "ON" and push to test switch

Frequency
50/60Hz

Battery Discharge Time
1.5 Hours

Operating Voltage
120/277

Operating Temp.
0°C ~ 50°C

Output Lumens
700 Max.

Output
AC Output



APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

660 NW PEACOCK BLVD. | PORT ST. LUCIE, FL 34986 | TEL: 772.879.0178 | TAMLITEUSA.COM

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

AMPERAGE/WATTAGE

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
OMX7000-ACTD	2.8	2.8	0.270	0.270

LAMP COMPATIBILITY

Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.

Operates one 8W-14W T5, one 17W-40W T8 through T12, one 13W-26W 4-pin compact or one 18W-36W 4-pin long compact fluorescent lamps. Refer to lamp compatibility chart for a complete list of lamps.

LAMP	WATTS	INITIAL LUMENS	LAMP	WATTS	INITIAL LUMENS	LAMP	WATTS	INITIAL LUMENS
		1-Lamp			1-Lamp			1-Lamp
T5	14	650	T12	40	650	4-Pin PL CF	32	650
T8	17	500	4-Pin PL CF	13	450	4-Pin Long CF	18	525
T8	32	700	4-Pin PL CF	18	475	4-Pin Long CF	24	600
T12	20	525	4-Pin PL CF	26	575	4-Pin Long CF	36	650

MOUNTING SPECIFICATIONS

Suitable for installation inside, on top or in remote* of the fixture

Can be used in both switched and unswitched fixtures

CERTIFICATIONS/WARRANTY

Listing
 UL Listed for factory or field installation

Compliance
 Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Location Rating:
 Suitable for damp locations.

Warranty
 Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Sample Part Number: OMX7000-ACTD

OMX	7000	-ACTD
SERIES	LUMENS	OPTION
OMX	[7000] : 700 Lumens	[-ACTD] : Time Delay

NOTES

*When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.