

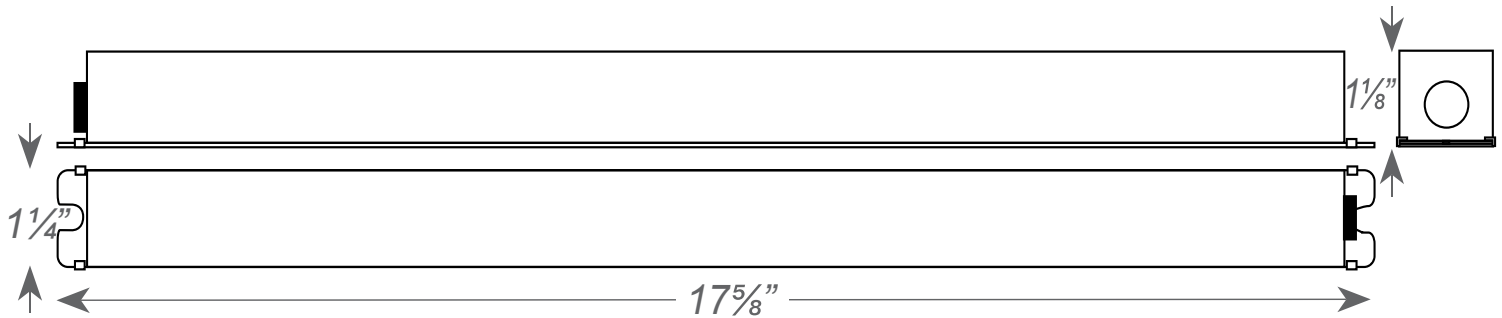
MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

SERIES SPECIFICATIONS
OMX SERIES

1300 Lumen Low Profile Emergency T5 Fluorescent Ballast
 120/277VAC



LED Test switch included.


LINE DRAWING

CONSTRUCTION

Housing
 Low profile galvanized steel construction

Test Switch
 LED illuminated test switch.

Time Delay
 Time delay to overcome end of life circuit protection

ELECTRICAL SPECIFICATIONS

Battery Type
 8.4V Rechargeable Ni-Cad

Emergency Illumination
 Minimum 90 Minutes

Battery Recharge Time
 24 Hours

LED Indicator
 Charge rate/power "ON" and push to test switch

Frequency
 50/60Hz

Battery Discharge Time
 1.5 Hours

Operating Voltage
 120/277

Operating Temp.
 0°C ~ 50°C

Output Lumens
 1300 Max.

Output
 AC output

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

AMPERAGE/WATTAGE

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
OMX1300-T5	2.7	2.7	0.130	0.130

LAMP COMPATIBILITY

Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.

Operates one 14W-54W T5/T5HO, one 17W-40W T8 through T12, one 13W-26W 4-pin compact or one 18W-50W 4-pin long compact fluorescent lamp. Refer to lamp compatibility chart for a complete list of lamps.

LAMP	WATTS	INITIAL LUMENS	LAMP	WATTS	INITIAL LUMENS	LAMP	WATTS	INITIAL LUMENS
		1-Lamp			1-Lamp			1-Lamp
T5	14	700	T8	32	1100	4-Pin Long CF	18	925
T5	21	850	T12	20	900	4-Pin Long CF	24	950
T5	28	1100	T12	40	1200	4-Pin Long CF	36	1025
T5HO	39	1200	4-Pin Long CF	13	800	4-Pin Long CF	40	1050
T5HO	54	1300	4-Pin Long CF	18	950	4-Pin Long CF	50	1100
T8	17	950	4-Pin Long CF	26	975			

MOUNTING

Suitable for installation inside, on top or in remote* of the fixture.

Can be used in both switched and unswitched fixtures

CERTIFICATIONS/WARRANTY

Listing
 UL Listed for factory or field installation

Compliance
 Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Location Rating:
 Suitable for damp locations.

Warranty
 Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Sample Part Number: OMX1300-T5

OMX	1300	-T5
SERIES	LUMENS	PROTECTION
OMX	[1300] : 1300 Lumens	[-T5] : For T5 Lamps

NOTES

*When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.