

| | | |
|---------------|--------|------|
| MODEL : | | TYPE |
| PROJECT : | | |
| PREPARED BY : | DATE : | |


SERIES SPECIFICATIONS

OMX SERIES

600 Lumen Extra Low Profile Emergency T5 Fluorescent Ballast
 120/277VAC with Time Delay



LINE DRAWING

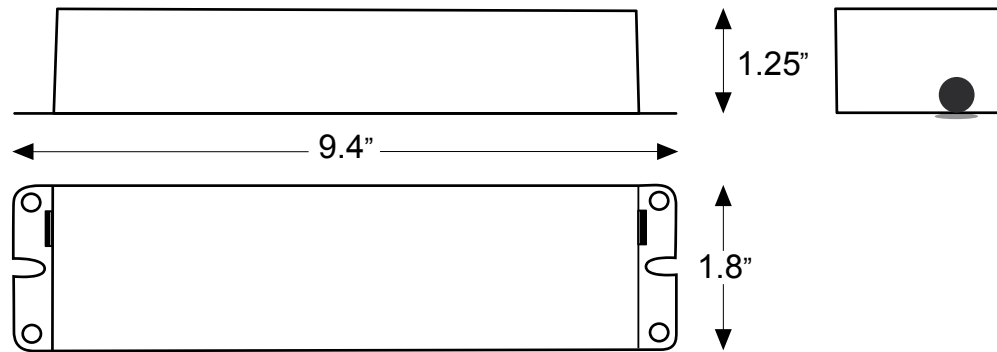

CONSTRUCTION

Housing
 Low profile galvanized steel construction

Time Delay
 Time delay to overcome end of life circuit protection

ELECTRICAL SPECIFICATIONS

Battery Type
 Lithium Iron Phosphate

Emergency Illumination
 Minimum 90 Minutes

Battery Recharge Time
 24 Hours

LED Indicator
 Charge rate/power "ON"
 and push to test switch

Frequency
 50/60Hz

Battery Discharge Time
 1.5 Hours

Operating Voltage
 120/277

Operating Temp.
 0°C ~ 50°C

Output Lumens
 600 Max.

| | | |
|---------------|--------|------|
| MODEL : | | TYPE |
| PROJECT : | | |
| PREPARED BY : | DATE : | |

LAMP COMPATIBILITY

Compatible with 1-lamp, 2-lamp, 3-lamp and 4-lamp fixtures with many ballast types including standard, rapid-start, slimline, instant-start, energysaving, dimming and electronic AC ballast – consult factory regarding specific applications

| LAMP | WATTS | INITIAL LUMENS |
|-------------------|--------|----------------|
| | | 1-Lamp |
| T5 | 21 | 600 |
| T8 | 17-40 | 600 |
| T10 | 17-40 | 600 |
| T12 | 17-40 | 600 |
| 4-Pin CFL | 13-32 | 600 |
| 4-Pin Long CFL | 18-40 | 600 |
| T9 Circleline CFL | 20-32 | 600 |
| T8 U-bend | 32 | 600 |
| T12 U-bend | 34, 40 | 600 |

MOUNTING

Suitable for installation inside, on top or in remote* of the fixture.

Can be used in both switched and unswitched fixtures

CERTIFICATIONS/WARRANTY

Listing
 UL Listed for factory or field installation

Compliance
 Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Location Rating:
 Suitable for damp locations.

Warranty
 Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.



| | | |
|---------------|--------|------|
| MODEL : | | TYPE |
| PROJECT : | | |
| PREPARED BY : | DATE : | |

ORDERING INFORMATION

Sample Part Number: OMX600

| | |
|--------|--------------------|
| OMX | 600 |
| SERIES | LUMENS |
| OMX | [600] : 600 Lumens |

NOTES

*When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

