

MODEL :	TYPE	
PROJECT :		
PREPARED BY :	DATE :	


SERIES SPECIFICATIONS

OMX SERIES

1500 Lumen Extra Low Profile Emergency Fluorescent Ballast
 120/277VAC with Time Delay



LINE DRAWING

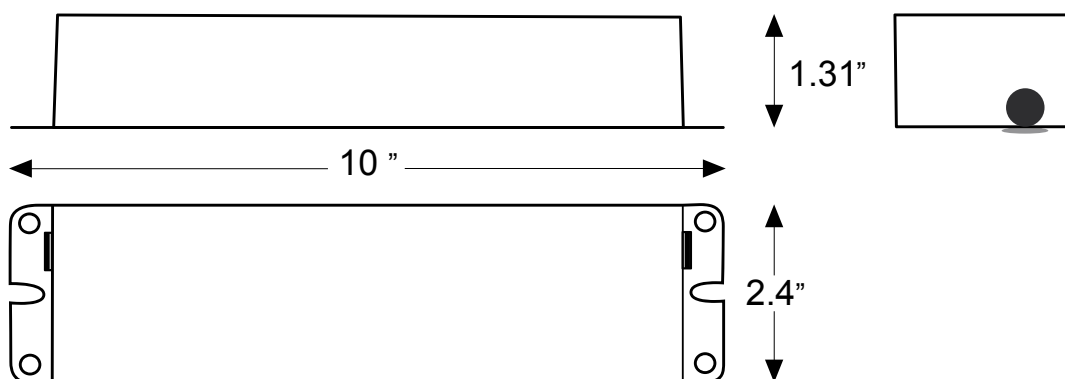

CONSTRUCTION

Housing
 Low profile galvanized steel construction

Time Delay
 Time delay to overcome end of life circuit protection

ELECTRICAL SPECIFICATIONS

Battery Type
 Lithium Iron Phosphate

Emergency Illumination
 Minimum 90 Minutes

Battery Recharge Time
 24 Hours

LED Indicator
 Charge rate/power "ON"
 and push to test switch

Frequency
 50/60Hz

Battery Discharge Time
 1.5 Hours

Operating Voltage
 120/277

Operating Temp.
 0°C ~ 50°C

Output Lumens
 1500 Max.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

LAMP COMPATIBILITY

Compatible with 1-lamp, 2-lamp, 3-lamp and 4-lamp fixtures with many ballast types including standard, rapid-start, slimline, instant-start, energy saving, dimming and electronic AC ballast – consult factory regarding specific applications

LAMP	Initial Lumens	Watts	
		1-Lamp	2-Lamp
T5	1500	n/a	8-28
T5HO	1500	39, 54	n/a
T8	1500	40-215	17-40
T10	1500	40-215	17-40
T12	1500	40-215	17-40
4-Pin CFL	1500	n/a	13-42
4-Pin Long CFL	1500	n/a	18-55
T9 Circleline CFL	1500	n/a	20-40
T8 U-bend	1500	n/a	32
T12 U-bend	1500	n/a	34, 40

MOUNTING

Suitable for installation inside, on top or in remote* of the fixture.

Can be used in both switched and unswitched fixtures

CERTIFICATIONS/WARRANTY

Listing
 UL Listed for factory or field installation

Compliance
 Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Location Rating:
 Suitable for damp locations.

Warranty
 Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Sample Part Number: OMX1500

OMX	1500
SERIES	LUMENS
OMX	[1500] : 1500 Lumens

NOTES

*When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.