



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: TASFR

DESCRIPTION



TASF Series

The TASF series surface mount fixtures sleek design uses LED as a light source. The TASFR fixtures are long lasting and energy efficient. Fixtures can be surface mounted directly to a junction box using the mounting bracket or can be mounted to either a 4" or 6" recessed can using repositionable fixture clips. The TASF comes with a safety support for ease of installation.



FEATURES & SPECIFICATIONS

Housing Material

Water resistant plastic with aluminum heat sink

Lens Material

Acrylic

Color

White

Diffuser Finish

Frosted


Location Rating

Suitable for Wet locations

Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

LINE DRAWING

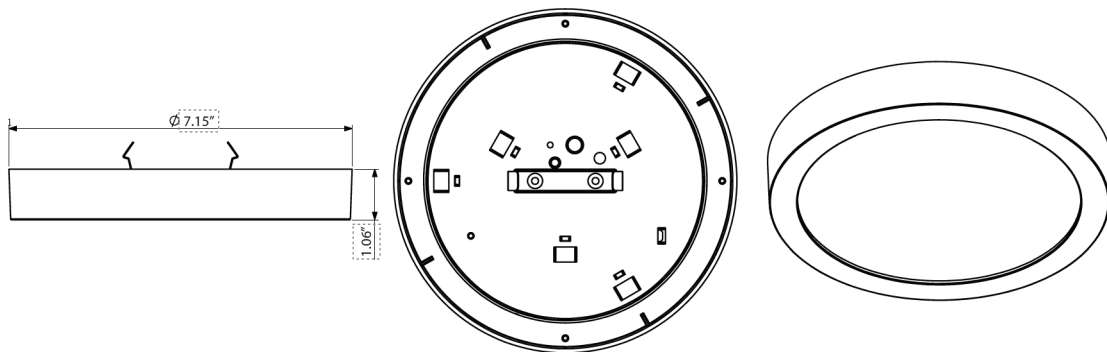



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: TASFR

ORDERING INFORMATION


Example: TASFR7-4W

SERIES	SHAPE	SIZE	COLOR TEMP	COLOR
TASF	[R] : Round	[7] : 7"	[-3] : 3000K	[W] : White


ELECTRICAL SPECIFICATIONS

Storage Temp.	-35°C ~ +85°C
Operating Temp.	-35°C ~ +85°C
Input Voltage (V AC)	120VAC (+/- 10%)
Input Wattage	14.47W
Efficacy	70+ lm/W
CRI	Ra 92.6
Color Temp	3000K
Power Factor	>0.9
THD	< 10%
Viewing Angle (50%)	120°
Starting Time	113 ms
LED Forwarder Current	240 mA
Duv	0.0003
Lumens	1000+ lm

PERFORMANCE SPECIFICATIONS



TAMLITE LIGHTING AMENITY
 TASFR7-4W
 Horizontal Footcandles
 Light Loss Factor = 1.00
 Lumens Per Lamp = 1030.8
 Lumens = 1030.8
 Mounting Height = 10.00 Ft.
 Maximum Calculated Value = 3.60 Fc
 Arrangement: Single



Polar Graph
 Maximum Candela = 360.59
 Located at Horizontal Angle = 202.5
 Vertical Angle = 1
 Vertical Plane Through Horizontal Angles
 (202.5 - 22.5)
 Horizontal Cone Through Vertical Angle
 (1)