



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

Catalog #:	01/30/2018
Project:	Type:
Prepared By:	

HOUSING

Die cast aluminum housing, removable hinged door with gasket and captive corrosion resistant stainless steel screws, 1/2" coin plugs with O-rings for conduit entry or photocell installation on both sides and top, durable bronze powdercoat finish.

LENS

Molded wedge shaped prismatic surface borosilicate glass lens

MOUNTING

Has cast-in template for mounting directly over a 4" recessed box or use 1/2" surface mount conduit connection.

ELECTRICAL DETAILS

WATTS : 78.02
INPUT VOLTAGE : 120-277V
FREQUENCY : 50/60 Hz
POWER FACTOR : .9481

LIGHT OUTPUT PERFORMANCE

DELIVERED LUMENS : 9953
LUMENS PER WATT : 127.57
COLOR TEMP : 5000K
CRI : 72
IES DISTRIBUTION : Type IV
LIFE : 50,000 HRS.

LISTINGS/RATINGS/COMPLIANCE

UL Listed
DLC Listed*
Suitable for wet locations.

WARRANTY

Guaranteed for five years against mechanical defects in manufacturing.

NOTES

Product performance may vary depending on model and end user environment.

Fixture is dark sky compliant when full cutoff visor (included) is installed.

*Not all product variations meet Design Light Consortium Qualifications. Please verify that the product is listed on the DLC products list at www.designlightconsortium.org/QPL.


*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***

W2LED Series

80W LED Wall Pack



SPECIFICATIONS / DIMENSIONS

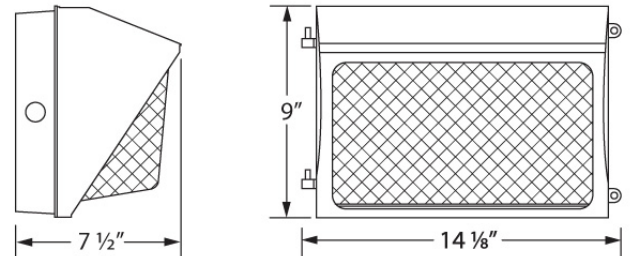

ORDERING INFORMATION

Sample Part Code: W2LED805K

W2LED	80	5K
SERIES	WATTAGE	COLOR TEMP

W2LED [80] : 80 watts [5K] : 5000K