

MODEL :	TYPE	
PROJECT :		
PREPARED BY :		
DATE :		


SERIES SPECIFICATIONS

WLRLED4 SERIES

The WLRLED series is a cost effective, energy-efficient utility lighting fixture for surface-mount application such as corridors, stairwells, public room, school, hospital, utility area etc.



LINE DRAWINGS

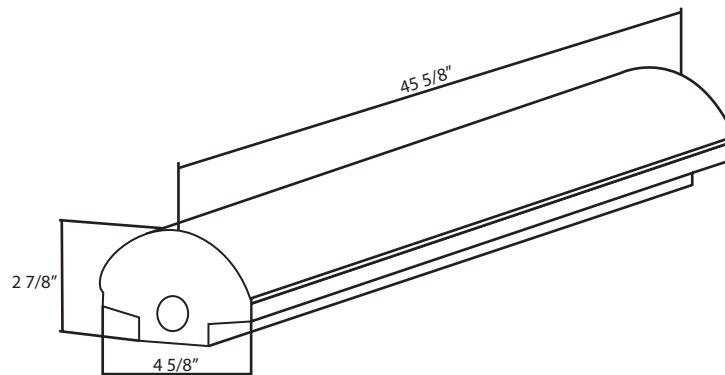

CONSTRUCTION

Housing Material

Heavy gauge steel

Color

White

Lens Material

Polycarbonate

Lens Type

Frosted

ELECTRICAL SPECIFICATIONS

Wattage

40W

Lumens

4800 Lm

Efficacy

120 Lm/W

CRI

> 80

CCT

4000-5000K

Ambient Temp.

-30°C ~ 42°C

Input Voltage

120-277 VAC

Frequency

50/60Hz

Power Factor

> 0.95

Dimming

0-10V



APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

660 NW PEACOCK BLVD.

PORT ST. LUCIE, FL 34986

TEL: 772.879.0178

TAMLITEUSA.COM

MODEL :	TYPE
PROJECT :	
PREPARED BY :	DATE :

CERTIFICATIONS/WARRANTY

Listing:

UL Listed

Location Rating:

Suitable for damp locations

Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

DLC Listing

Fixtures are DLC listed and featured on the Qualified Products List(QPL).*

ORDERING INFORMATION

Sample Part Number: WLRLED4-48D1L850

WLRLED	4	-48	D1	L	8	
SERIES	LENGTH	LUMENS	DRIVER QTY.	TECHNOLOGY	CRI	COLOR TEMP
WLRLED	[4] : 4 Ft.	[-48] : 4800 Lumens	[D1] : 1 Driver	[L] : LED	[8] : 80 CRI	[40] : 4000K
						[50] : 5000K

ACCESSORIES

V Hooks

WLRLED-V-HOOK (Sold Separately)

Reflectors

WLRLED-REFL (Sold Separately)

NOTES

*Not all product variations meet Design Light Consortium Qualifications. Please verify that the product is listed on the DLC products list at www.designlightconsortium.org/QPL.