



| | |
|--------------|---------|
| CONTRACTOR: | |
| PROJECT: | DATE: |
| PREPARED BY: | MODEL#: |

SERIES SPECIFICATIONS



CXE Series

The CXE series offers a sleek, high end modern look with long-life, energy efficiency and uniform illumination. Available in single face and double face.



CONSTRUCTION

Housing

Premium grade, extruded aluminum housing

Transfer switch

Internal solid-state transfer switch automatically connects the internal battery to lamp heads

Illumination

Ultra bright, long life LED

Charger

Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Listing

UL Listed

Location Rating

Suitable for damp locations

Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

Compliance

Compliance Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

MOUNTING SPECIFICATIONS


Canopy

Aluminum mounting canopy included for top, end or back mount

Chevrons

Self-adhesive chevron appliques and guide template provided for directional indication

LINE DRAWINGS

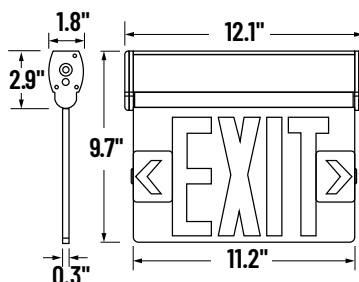



| | |
|--------------|---------|
| CONTRACTOR: | |
| PROJECT: | DATE: |
| PREPARED BY: | MODEL#: |

ELECTRICAL SPECIFICATIONS

Battery Type

4.8V Rechargeable NiCad

Emergency Illumination

Minimum 90 Minutes

Supply Voltage

A/C 120/277V - 60HZ

Low Voltage Disconnect

Prevents battery from deep discharge

LED Indicator

Charge rate/power "ON" and push to test switch

Battery Recharge Time

24 Hours

Operating Voltage

120/277

ORDERING INFORMATION

EXAMPLE: CXE2RAEM

| SERIES | # OF FACES | LETTER COLOR | HOUSING COLOR | BATTERY |
|--------|----------------------------------|--------------|--------------------------|-------------------------|
| CXE | [1] : 1 head [2] : 2 head | [R] : Red | [A] : Brushed Aluminum | [EM] : Battery Backup |