

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	



SPECIFICATIONS

DL406R SERIES

6" Shallow Non-IC Remodel housing for line voltage (120V) for use with 150W R40/PAR38 lamps. These are designed for use in non-insulated ceilings for general floor and task lighting.



LINE DRAWING

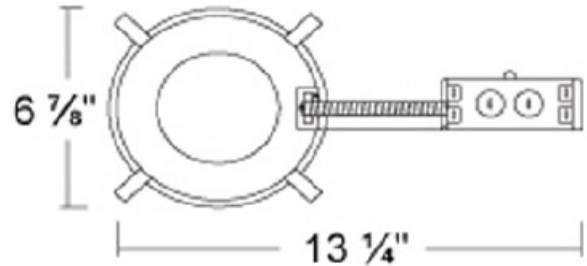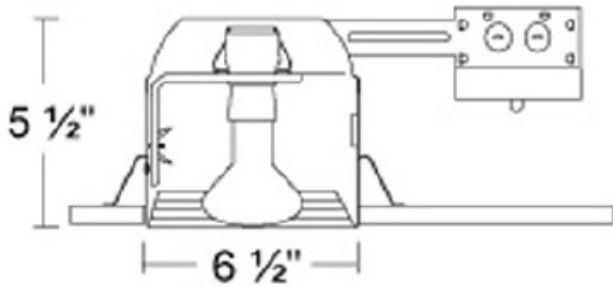

CONSTRUCTION

HOUSING

Non-IC housing, thermally protected against misuse of insulation materials and improper lamping
 J-box is listed for through-branch circuit wiring
 (6) 1/2" knockouts, (1) 3/4" knockout and (4) pry-outs with Romex cable clamp
 5 1/2" height allows use in 2" x 6" construction

MOUNTING

Housing adjusts to accommodate various ceiling thicknesses
 4 Push-up locking remodel clips designed to accommodate different ceiling thickness
 Ceiling Cutout Size : 6.31"

ELECTRICAL

SOCKET

Medium base porcelain socket on adjustable mounting bracket for proper lamp positioning

LISTINGS/RATINGS

LISTINGS/RATINGS/COMPLIANCE

UL, C-UL listed for damp location and feed through wiring.

WARRANTY

WARRANTY

Guaranteed one year from the purchase date of the product, against mechanical defects in manufacturing.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Sample Part Code: DL406R

DL	406	R
SERIES	HOUSING	TYPE
DL	406	[R] : Remodel

ACCESSORIES

ACCESSORIES

- | | |
|---|---|
| <p>TM3 (75W. Max), TM4 (150W Max) 6" Open Trims (Metal)</p> <p>TM3B (75W. Max), TM4B (150W Max) 6" Baffle Trims (Metal ring on special finishes)</p> <p>TM3R (75W. Max), TM4R (150W Max) 6" Reflector Trims (Metal ring on special finishes)</p> <p>TM8E (75W Max) 6" Eyeball with Baffle (All steel construction)</p> <p>TM98E (75W Max) 6" Regressed Eyeball (White metal ring)</p> <p>TM630R (75W Max), TM638R (150W Max) 6" Reflector with Regressed Gimbal Ring</p> <p>TM630B (75W Max), TM638B (150W Max) 6: Baffle with Regressed Gimbal (metal ring on special finishes)</p> <p>TM330 (75W Max), TM338 (150W Max) 6" Gimbal Ring (All steel construction)</p> | <p>TM52 (60W Max) 6" Wall Wash (White metal ring only/All steel construction)</p> <p>TM54C (75W Max) 6" Wall Wash with Reflector</p> <p>TM54B (75W Max) 6" Wall Wash with Baffle</p> <p>TM42 (60W Max) 6" Baffle with Fresnel Lens</p> <p>TM43 (60W Max) 6" Baffle with Abalite Lens</p> <p>TM44 (60W Max) 6: Baffle with Prismatic Lens</p> <p>TM13 (60W Max) 6" Flat Frosted Shower Trim</p> <p>TM15(P) (60W Max) 6" Albalite Glass Shower Trim</p> <p>TM16(P) (60W Max) 6" Drop Opal Glass Shower Trim</p> <p>TM17(P) (60W Max) 6" Fresnel Glass Shower Trim</p> |
|---|---|