

MODEL:	TYPE	
PROJECT:		
PREPARED BY:	DATE:	

SERIES SPECIFICATIONS

EXPC-A SERIES

The EXPC-A series adjustable thermoplastic exit sign and emergency lighting combination unit offers long lamp life, energy efficiency and uniform illumination with square glare-free incandescent heads that can be positioned on the side or top of the fixture to fit numerous applications.












LINE DRAWING

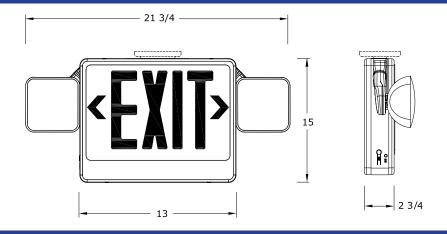

CONSTRUCTION

Housing

Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic

Chevrons

Snap-out chevron directional indicators

Reflector

Smooth thermoplastic reflector

Lamp heads

2 fully adjustable 5.4W, glare free lamp heads

BATTERY SPECIFICATIONS

Battery Type 6V Sealed lead acid

Low Voltage Disconnect Prevents battery from deep discharge

Emergency Illumination Minimum 90 Minutes

LED Indicator Charge rate/power "ON" and push to test switch

Battery Recharge Time 24 Hours.

Battery Charger Two rate, fully automatic solid-state



APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



MODEL:	TYPE	
PROJECT:		
PREPARED BY:	DATE:	

ELECTRICAL SPECIFICATIONS CONT.

Frequency **Operating Voltage Input Watts** 50/60Hz 120/277 10W @ 120V 10W @ 277V

Operating Temp Input Amps 20°C ~ 40°C 0.10A @ 120V 0.05A @ 277V

MOUNTING SPECIFICATIONS

Surface mount via "easy connect" backplatel which fits most standard junction boxes

Snaps into place making internal electrical connections

Conduit mounts using knockouts on the side or top of housing

Suitable for wall or ceiling mount

Options

SD: RC

Self-diagnostic test feature continually diagnoses unit's performance and tests system to ensure reliable operation and to meet electrical and life safety codes

Remote capacity

CERTIFICATIONS/WARRANTY

Listing Safety Certifications

UL Listed UL924, NFPA 101 Life Safety Code, NEC, OSHA,

Local and State Codes.

Location Rating Suitable for damp locations

Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.





MODEL:	TYPE	
PROJECT:		
PREPARED BY:	DATE :	

ORDERING INFORMATION

Sample Part Number: EXPC3RWEMA

EXPC	3			EM	А	
SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPERATION	OPTION	OPTION
EXPC	[3] : Universale Single and Double Face	[R] : Red	[B]: Black	[EM] : Battery Backup	[A] : Adjustable Heads	[BLANK] : No Option
		[G] : Green	[W]:White			[RC] : Remote Capable
						[SD] : Self-Diagnostic