

CATALOG #	DATE
PROJECT	TYPE
PREPARED BY	

IC206ATQ

6" IC Air-Tight New Work Housing
Line Voltage - 90W BR40, 75W R/PAR30, 60W A19


FEATURES

- IC rated housing, thermally protected against misuse of insulation materials and improper lamping
- J-box is listed for through-branch circuit wiring with (6) 1/2", (1) 3/4" knockouts and (4) pry-outs Romex cable clamp
- Housing adjusts to accommodate various ceiling thicknesses
- Medium base porcelain socket on adjustable mounting bracket for proper lamp positioning
- Pre-installed hanger bars allow the housing to be positioned at any point within a 24" joist span
- Triangulated bar hangers with nails and leveling tab on the footprint
- Bar hangers are designed to fit T-bar spine without additional clamps for use in a drop ceiling
- 7 1/2" height allows use in 2" x 8" construction
- UL, C-UL listed for damp location, feed through wiring and direct contact with insulation



PRODUCT DIMENSIONS

NOMINAL SIZE **HEIGHT**
A 7 1/2" Ceiling Cut-Out: 6.31"

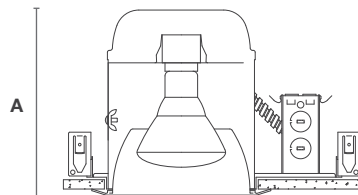

ORDERING INFORMATION Sample Product Code : IC206ATQ

PRODUCT CODE	DESCRIPTION
IC206AT	6" IC Air-Tight New Work Housing, Line Voltage - 90W BR40, 75W R/PAR30, 60W A19
IC206ATQ	6" IC Air-Tight New Work Housing with Quick-Connect, Line Voltage - 90W BR40, 75W R/PAR30, 60W A19

