


# TAMLITE LIGHTING

## IC906AT

6" Slope IC Air-Tight New Work Housing  
Line Voltage: 120V - 100W R40/PAR38

CATALOG #	DATE
PROJECT	TYPE
PREPARED BY	

6" Incandescent Slope Housings

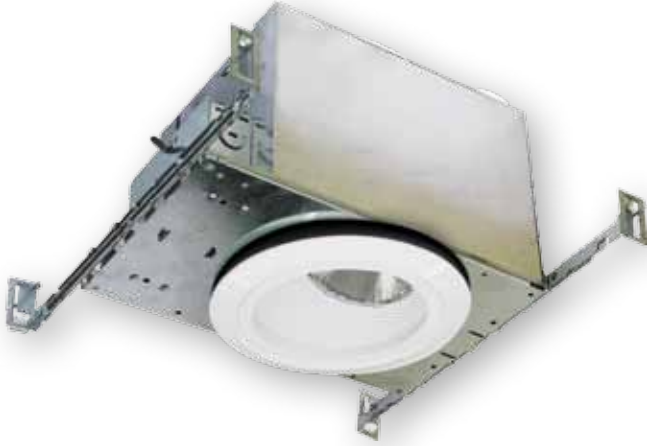


### FEATURES

- IC rated air-tight standard slope housing, thermally protected against misuse of insulation materials and improper lamping
- Housing designed to accommodate 2/12 to 6/12 pitch (9° to 27°)
- J-box is listed for through-branch circuit wiring with (5) 1/2" knockouts, and (4) pry-outs Romex cable clamp
- Housing adjusts to accommodate various ceiling thicknesses
- Medium base porcelain socket on adjustable mounting bracket for proper lamp positioning
- Pre-installed hanger bars allow the housing to be positioned at any point within a 24" joist span
- Triangulated bar hangers with nails and leveling tab on the footprint
- Bar hangers are designed to fit T-bar spine without additional clamps for use in a drop ceiling
- 7 1/2" height allows use in 2" x 8" construction
- UL, C-UL listed for damp location, feed through wiring and direct contact with insulation



### PRODUCT DIMENSIONS

**NOMINAL SIZE**    **HEIGHT**  
A                      7 1/2"              **Ceiling Cut-Out:** 7.25" X 7.0"

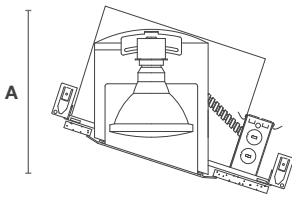

### ORDERING INFORMATION    Sample Product Code : IC906AT

PRODUCT CODE	DESCRIPTION
IC906AT	6" Slope IC Air-Tight New Work Housing, Line Voltage: 120V - 100W R40/PAR38

RECESSED DOWNLIGHTING

