

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	


SERIES SPECIFICATIONS

EXP SERIES

The EXP series thermoplastic LED exit sign offers long lamp life, energy efficiency and uniform illumination; all components feature a snap-fit construction for speed and ease of installation.



LINE DRAWING

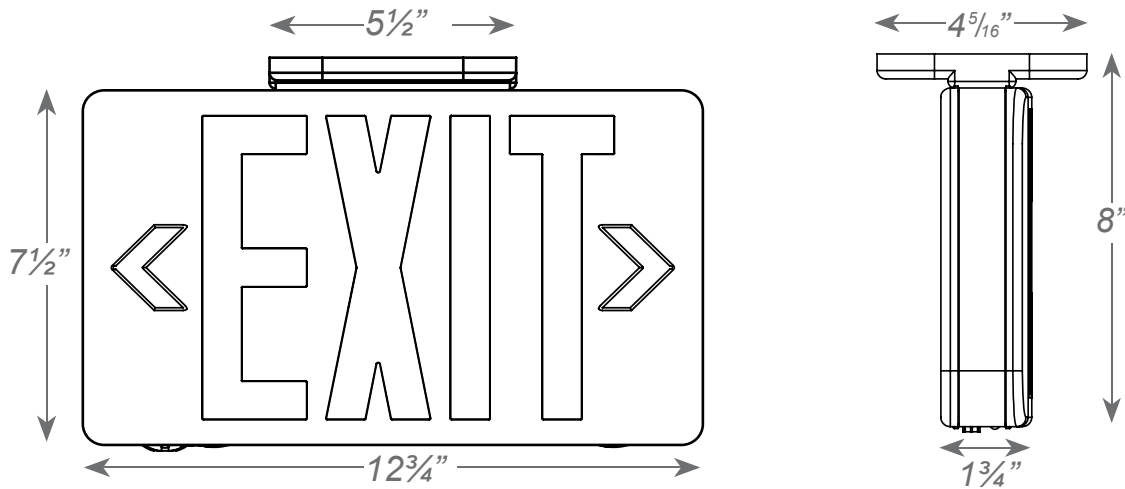

CONSTRUCTION

Housing

Injection-molded, engineering grade, 5VA flame retardant, high-impact thermoplastic

Transfer switch

Internal solid-state transfer switch automatically connects the internal battery to lamp heads

Chevrons

Easy snap-out chevron directional indicators.

Illumination

Ultra bright, long life Red or Green LED

Charger

Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

## ELECTRICAL SPECIFICATIONS

Battery Type 4.8V Rechargeable NiCad	Emergency Illumination Minimum 90 Minutes	Battery Recharge Time 24 Hours
Low Voltage Disconnect Prevents battery from deep discharge	Frequency 60Hz	Battery Discharge Time 1.5 Hours
Operating Voltage 120/277	Operating Temp 0°C ~ 50°C	

## AMPERAGE/WATTAGE

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EXP	3.8	3.8	0.034	0.020

## MOUNTING SPECIFICATIONS

Easy snap mounting canopy included for top or end mount.

Universal K/O pattern on back plate for wall mount.

## OPTIONS

**SD**  
Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes

**DC**  
Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time

**USA**  
Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act

**CW**  
Signs available with requested "special" wording

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

## CERTIFICATIONS/WARRANTY

Listing  
UL Listed

Compliance  
Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Location Rating:  
Suitable for damp locations

Warranty  
Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

## ORDERING INFORMATION

Part Number: EXP3RWEM

EXP					
SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPERATION	OPTIONS
EXP	[1] : Single Face	[G] : Green	[B] : Black	[BLANK] : A/C Only	[BLANK] : No Option
	[3] : Universal Single and Double Face	[R] : Red	[W] : White	[EM] : Battery Backup	[CW] : Custom Wording
					[DC] : Dual Circuit
					[SD] : Self Diagnostics
					[USA] : Assembled in the USA

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION