


MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

SERIES SPECIFICATIONS

Compact Wet Location LED Exit Sign



LINE DRAWING

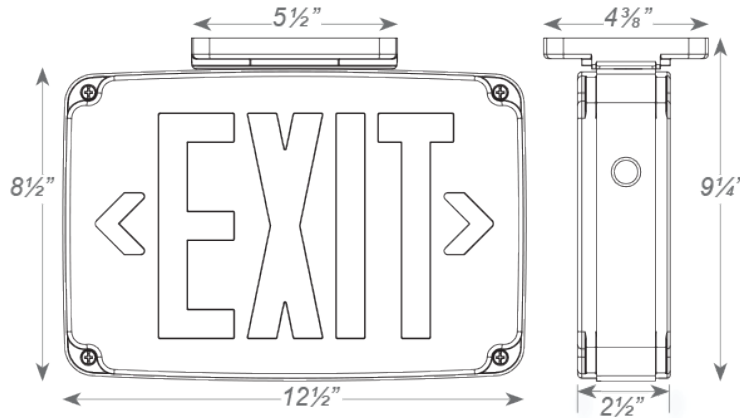

CONSTRUCTION

Housing Material
 Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic

Color
 White

Letter Color
 Red

Remote Capability
 None

Chevrons
 Easy snap-out chevron directional indicators

BATTERY SPECIFICATIONS

Battery Voltage
 4.8V

Low Voltage Disconnect
 Prevents battery from deep discharge

Battery Type
 Maintenance-free, rechargeable NiCad battery

LED Indicator
 Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing

Battery Recharge Time
 24 Hours.

Battery Charger
 Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ELECTRICAL SPECIFICATIONS CONT.

Input Wattage (120/277)
2.7/2.7

Input Amperage (120/277)
0.025/0.011A

MOUNTING SPECIFICATIONS

Mounting Options

Polycarbonate mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount. Top and side K/O's provided for conduit feed applications.

CERTIFICATIONS/WARRANTY

Listing
UL Listed

Safety Certifications
Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA

Warranty

Guaranteed five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

ORDERING INFORMATION

Sample Part Number: EXWT2RWEM

EXWT	2	R	W	EM
SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPERATION
EXWT	[2] : Double Face	[R] : Red	[W] : White	[EM] : Emergency Operation