



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: MSR-LED-WP

DESCRIPTION



MSR-LED-WP

Mini wet location impact resistant LED.

The MSR-LED-WP is an adjustable micro wet location thermoplastic LED emergency light.



FEATURES/WARRANTY

Housing

Injection molded, engineering grade, UV-stabilized, UL 94V-0, high impact resistant thermoplastic

Transfer switch

Internal solid-state transfer switch automatically connects the internal battery to lamp heads

Lamp Heads

Adjustable high performance, LED lamp heads with 8 LEDs standard

Charger

Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Surface mount via "easy connect" backplate which fits most standard junction boxes
- Snaps into place making internal electrical connections
- Flexible conduit mounts using knockouts on backplate

Listings

UL listed to US safety standards. Wet location listed.

Compliance

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty

5-year limited warranty.

ELECTRICAL SPECIFICATIONS

Battery Type

Rechargeable NiCad

Operating Voltage

120/277 V

Battery Recharge Time

24 Hours

Total Lumen Output

118Lm

Emergency Illumination

Minimum 90 Minutes

Battery Discharge Time

1.5 Hours


Low Voltage Disconnect

Prevents battery from deep discharge

LED Indicator

Charge rate/power "ON" and push to test switch

LINE DRAWING

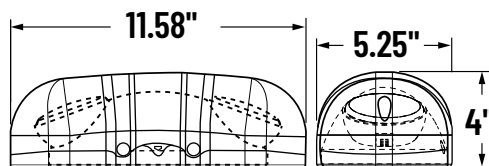



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: MSR-LED-WP

ORDERING INFORMATION

Example: MSR-LED-WP

SERIES	WATTAGE	COLOR TEMP
MSR	-LED: LED	-WP: WATERPROOF

AMPERAGE/WATTAGE

SERIES	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
MSR	.85	.80	0.010	0.010