



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

SERIES SPECIFICATIONS



W2LED SERIES

Die-cast aluminum housing, removable hinged door with gasket and captive corrosion resistant stainless steel screws, 1/2" coin plugs with O-rings for conduit entry or photocell installation on both sides and top, durable bronze powder coat finish.



FEATURES

Housing Material: Die-cast aluminum housing & hinged front frame

Finish: Bronze powder coat

Light Source: LED

Lens: Molded wedge shaped prismatic surface borosilicate glass lens

Coin Plugs: 1/2" coin plugs: left side, right side, top & rear

Dimming: 0-10v

ELECTRICAL SPECIFICATIONS

50W

Input Voltage: 120-277V AC

Power Factor: >0.9

Frequency: 50/60Hz

Lifespan: 50,000Hrs.

Lumen Maintenance*: L70 >84KHrs, tC-55°C (Reported)

Input Current: 0.41A Max.

Efficacy: 137+lm/W

CRI: >70

Emergency Wattage: 12W

Input Power: 50W

Color Temp.: 5000K

Distribution: Type IV

Lumens: 6424lm

Emergency Lumens: 2100lm

60W

Input Voltage: 120-277V AC

Power Factor: >0.9

Frequency: 50/60Hz

Lifespan: 50,000Hrs.

Lumen Maintenance*: L70 >84KHrs, tC-55°C (Reported)

Input Current: 0.5A Max.

Efficacy: 132+lm/W

CRI: >70

Input Power: 60W

Color Temp.: 5000K

Distribution: Type IV

Lumens: 7731lm

80W

Input Voltage: 120-277V AC

Power Factor: 0.9

Frequency: 50/60Hz

Lifespan: 50,000Hrs.

Lumen Maintenance*: L70 >84KHrs, tC-55°C (Reported)

Input Current: 0.66A Max.

Efficacy: 139+lm/W

CRI: >70

Emergency Wattage: 12W

Input Power: 80W

Color Temp.: 5000K

Distribution: Type IV

Lumens: 10545lm

Emergency Lumens: 2100lm

CERTIFICATIONS/WARRANTY

Listing: UL Listed

Location Rating: Suitable for wet locations


DLC Listing: DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.**

Warranty: Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

LINE DRAWINGS

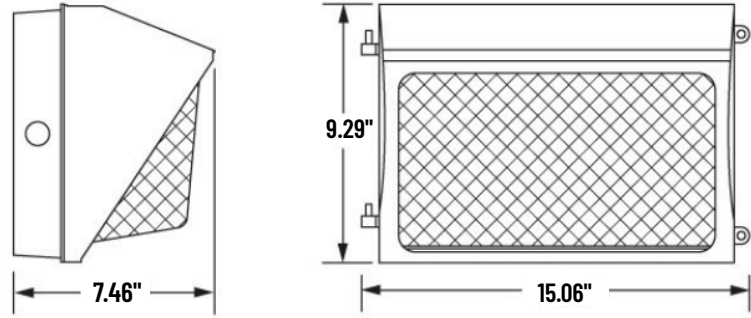

ORDERING INFORMATION

Example: W2LED805K-EM


SERIES	WATTAGE	COLOR TEMP.	OPTIONS
W2LED	[50]: 50W [60]: 60W [80]: 80W	[4K]: 4000K [5K]: 5000K	[-EM]: Emergency Driver* [-PC]: Photocell

* Not available on 60W

ACCESSORIES

VISOR

- W2-VISOR (Bronze)
- W2-VISOR WH (White)



APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION




CONTRACTOR:		DATE:
PROJECT:		MODEL#:
PREPARED BY:		


PHOTOMETRIC REPORTS

W2LED504K


Luminous Intensity Distribution Curve

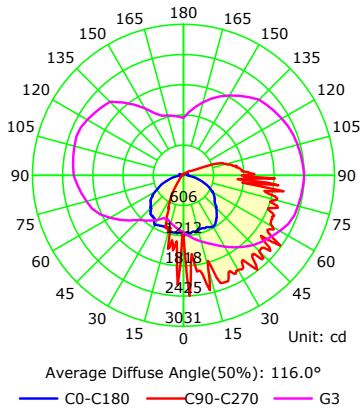




IsoLux Plot

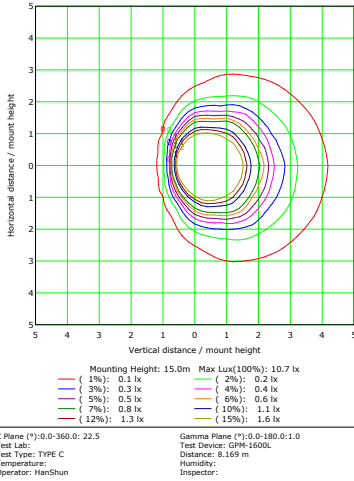




Isocandela Plot

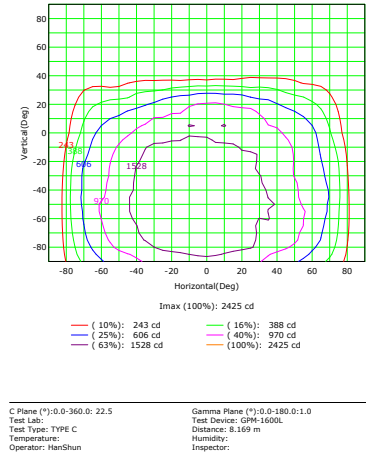

W2LED505K

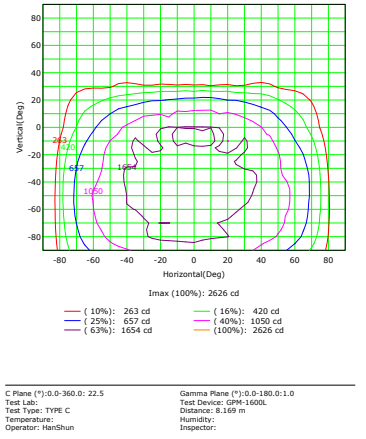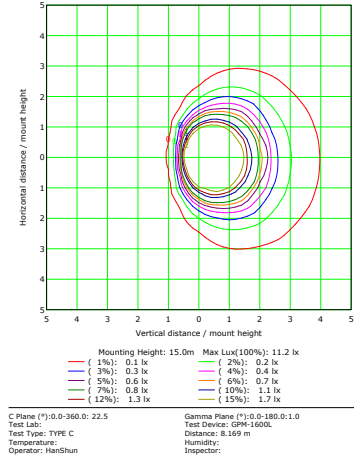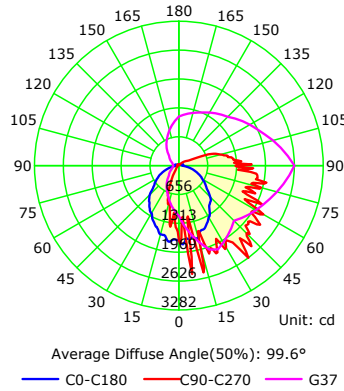

W2LED604K

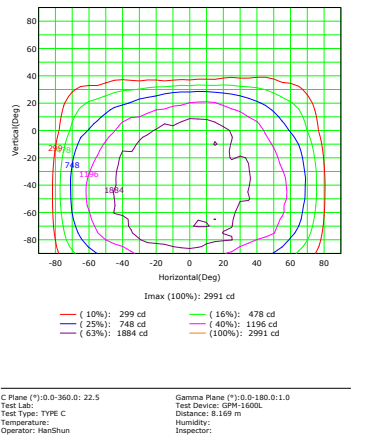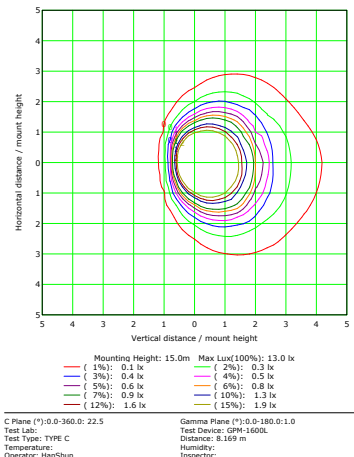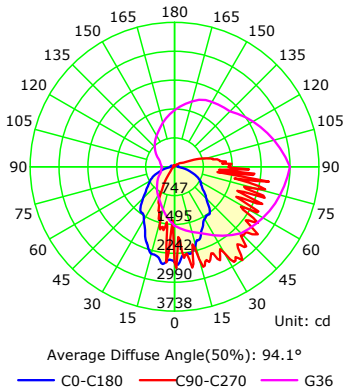

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION




CONTRACTOR:		DATE:
PROJECT:		MODEL#:
PREPARED BY:		


PHOTOMETRIC REPORTS

W2LED605K


Luminous Intensity Distribution Curve

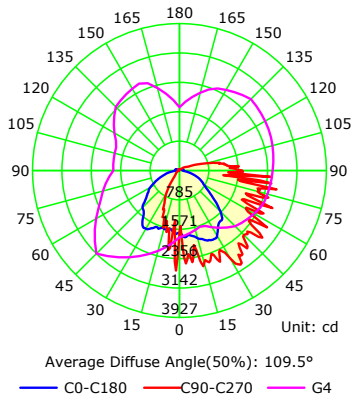




IsoLux Plot

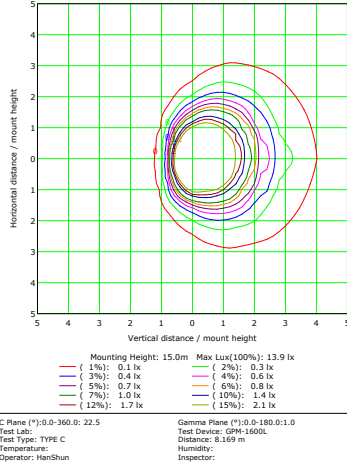




Isocandela Plot

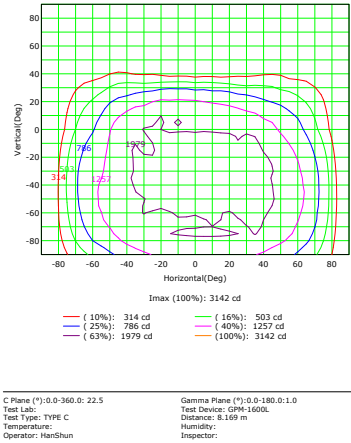

W2LED804K

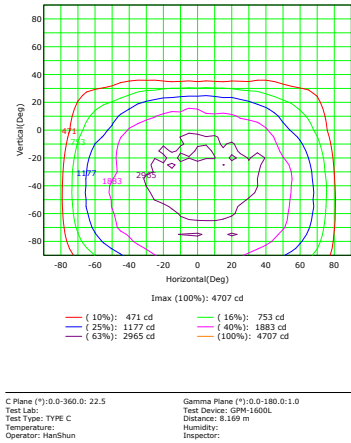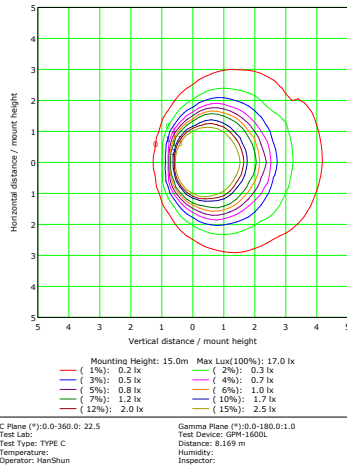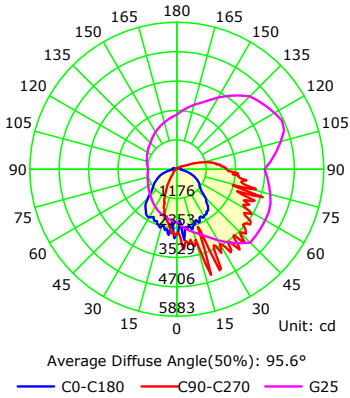

W2LED805K

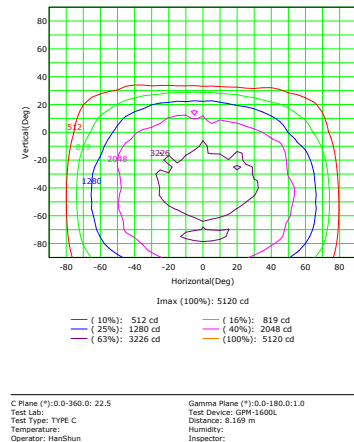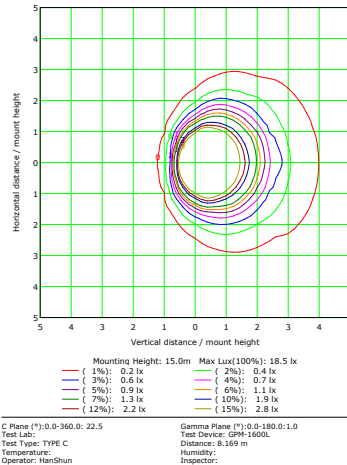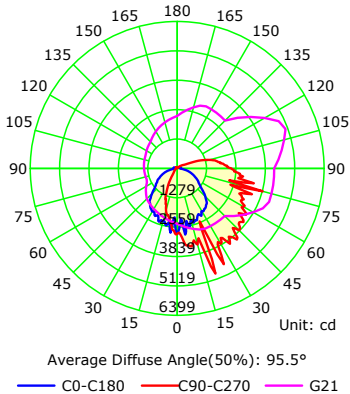

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION