

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	


SPECIFICATIONS

DL9068R SERIES

6" Super Slope Non-IC Remodel housing for line voltage (120V) for use with 150W R40/PAR38 lamps. These are designed for use in non-insulated ceilings for general floor and task lighting.



LINE DRAWING

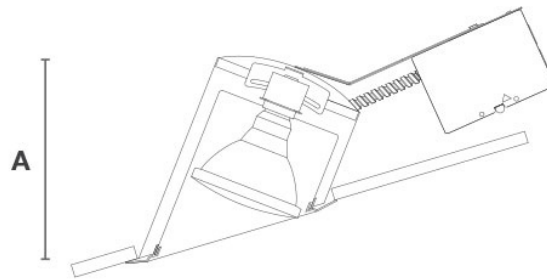

DIMENSIONS
A

H
7 1/4 "

CONSTRUCTION

HOUSING

Non-IC housing, thermally protected against misuse of insulation materials and improper lamping
 Housing designed to accommodate 7/12 to 12/12 pitch (30° to 45°)
 J-box is listed for through-branch circuit wiring
 (6) 1/2" knockouts, (1) 3/4" knockout and (4) pry-outs with Romex cable clamp
 7 1/4" height allows use in 2" x 8" construction

MOUNTING

Housing adjusts to accommodate various ceiling thicknesses
 4 Push-up locking remodel clips designed to accommodate different ceiling thickness
 Ceiling Cuout Size : 6.65" x 8.36"

ELECTRICAL

SOCKET

Medium base porcelain socket on adjustable mounting bracket for proper lamp positioning

LISTINGS/RATINGS

LISTINGS/RATINGS/COMPLIANCE

UL, C-UL listed for damp location and feed through wiring.

WARRANTY

WARRANTY

Guaranteed one year from the purchase date of the product, against mechanical defects in manufacturing.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Sample Part Code: DL9068R

DL	9068	R
SERIES	HOUSING	TYPE
DL	9068	[R] : Remodel

ACCESSORIES

ACCESSORIES

- TM48BL (150W Max) 6" Super Slope Baffle
- TM48RL (150W Max) 6" Super Slope Reflector