

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	


SERIES SPECIFICATIONS

LXP SERIES

The LXP slim series thermoplastic LED exit sign offers a modern look with long lamp life, energy efficiency and uniform illumination; all components feature a snap-fit construction for speed and ease of installation.



LINE DRAWING

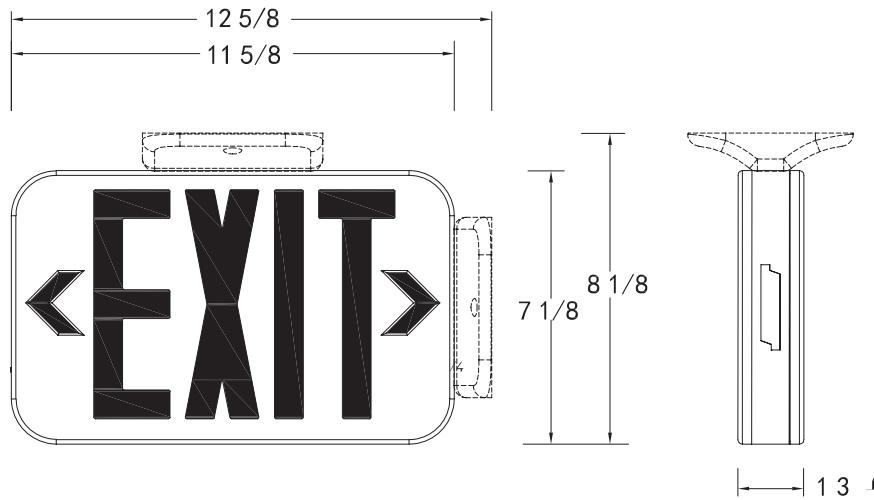

CONSTRUCTION

**Housing**  
Injection molded, engineering grade, UL-stabilized, UL94-0, high impact resistant thermoplastic

**Transfer switch**  
Internal solid-state transfer switch automatically connects the internal battery to lamp heads

**Chevrons**  
Easy snap out chevron directional indicators

**Remote Capacity\***  
3.4W

**Illumination**  
Energy saving, long life, LED Red or Green letters

**Charger**  
Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

**Remote Compatibility\***  
LSRH1 and LSRH2 - 3.6 Series



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

## ELECTRICAL SPECIFICATIONS

Battery Type  
Rechargeable NiCad

Emergency Illumination  
Minimum 90 Minutes

Battery Recharge Time  
24 Hours

Low Voltage Disconnect  
Prevents battery from deep  
discharge

LED Indicator  
Charge rate/power "ON" and  
push to test switch

Battery Discharge Time  
1.5 Hours

Operating Voltage  
120/277

## AMPERAGE/WATTAGE

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
LXP-RED	1.78	1.88	0.019	0.009
LXP-GREEN	1.49	1.57	0.019	0.009

## MOUNTING SPECIFICATIONS

Includes backplate with universal  
mounting pattern knockouts for  
simple back mounting

Quick install snap-fit canopy and  
mounting hardware for easy top or  
end mount.

Suitable for top, back, or side  
mount applications

## Options

RC  
Remote capable option will run up to (2) 3.6V LED  
remote heads for a minimum of 90 minutes

SD  
Self Diagnostic Option automatically tests the PCB  
Board, Battery and Lamp periodically through a series of  
self tests done Monthly, Bi-Annually and Annually.

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

## CERTIFICATIONS/WARRANTY

Listing  
UL Listed

Compliance  
Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Location Rating:  
Suitable for damp locations

### Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

## ORDERING INFORMATION

Part Number: LXP

LXP	3			EM	
SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
LXP	[3] Universal Single and Double Face	[G] : Green	[W] : White	[EM] : Battery Backup Standard	[BLANK] : No Options
		[R] : Red	[B] : Black		[RC] : Remote Capable
					[SD] : Self Diagnostic

## REMOTE COMPATIBILITY CHART

Use the below charts to pick the correct voltage for your remote capable device.

### REMOTE COMPATIBILITY CHART

SERIES	ESRH SERIES		LSRH SERIES (LED)		
	6V	12V	3.6V	9.6V	MULTI
ESLFX-2				X	X
LXP-RC			X		X
LXPC-RC			X		X
EXDC-RC			X		X
EXWTC-RC			X		X
ESLR-1RC			X		X
LSR-1RC			X		X
ESR-16R-65	X				X
LXPCP-RC				X	X
EXPCL-RC				X	X
ESR-16R-LED	X				X

SERIES	ESRH SERIES		LSRH SERIES (LED)		
	6V	12V	3.6V	9.6V	MULTI
ESR-1HO	X				X
LSDXR627	X				X
ESTFX-2	X				X
ESDXR6	X				X
ESDXRS6	X				X
ESDXR12		X			X
ESDXRS12		X			X
ESR-16R-125		X			X
ESR-16R-LED12		X			X
EXP-RC	X				X
LXWTC-RC			X		X

## NOTES

\*RC option only

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION