



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: EXWT

SERIES SPECIFICATIONS



EXWT Series

LED Compact Wet Location Exit Sign

LED (Single or Double Face)

The EXWT series compact wet location exit sign features a construction that is ideal for wet locations, while also being resistant to corrosive atmospheres, non-hazardous dust environments, frequent hose-downs, water spray or splashing water. Cold location standard.



CONSTRUCTION

Housing

5VA Flame retardant, UV- stabilized polycarbonate

Lens

High-impact resistant, UV-stabilized clear polycarbonate

Transfer switch

Internal solid-state transfer switch automatically connects the internal battery to lamp heads

Chevrons

Easy snap out chevron directional indicators

Illumination

Ultra bright, long life Red or Green LED


Gasket

Engineering grade silicone

Charger

Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

LINE DRAWINGS

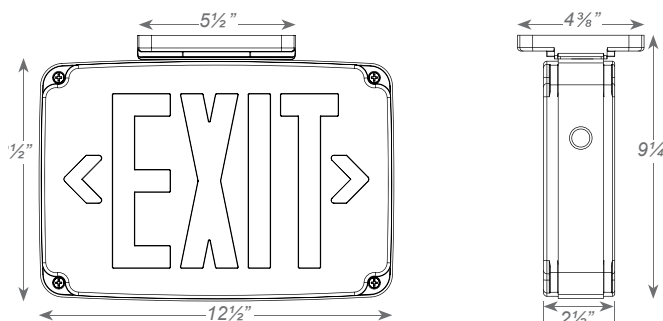



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: EXWT

ELECTRICAL SPECIFICATIONS

Battery Type

4.8V Rechargeable NiCad

Emergency Illumination

Minimum 90 Minutes

Battery Discharge Time

1.5 Hours

LED Indicator

Bi-color LED light alerts occupant on bat-tery condition (Green-normal Red-Check

Frequency

60Hz

Operating Voltage

120/277

Battery Recharge Time

24 Hours

MOUNTING SPECIFICATIONS

- Polycarbonate mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount.
- Top and side K/O's provided for conduit feed applications

OPTIONS

SDT

Self-diagnostic feature performs monthly, biannual and annual tests to ensure reliable operation and meet electrical and life safety codes

TP

Tamper-proof hardware helps prevent unauthorized access to the unit

USA - Assembled in the USA

Units parts are originated in China but are shipped and assembled in America by Americans

CERTIFICATIONS/WARRANTY

Listing

UL Listed

Location Rating

Suitable for wet locations

Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

Compliance

Compliance Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Cold Location Rating

Capable of operation down to 4°F (-20°C)

AMPERAGE/WATTAGE

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EXWT	2.7	2.7	0.025	0.011
EXWT-SD	3.3	3.4	0.030	0.014



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: EXWT

ORDERING INFORMATION

EXAMPLE: EXWT1GB

SERIES	# OF FACES	LETTER COLOR	HOUSING COLOR	OPERATION	OPTION
EXWT	[1] : Single Face	[G] : Green	[B] : Black	[BLANK] : A/C Only	[BLANK] : No Option
	[2] : Double Face	[R] : Red	[W] : White	[EM] : Battery Backup	[SDT] : Self-Diagnostic
					[TP] : Tamper-proof
					[USA] - Assembled in USA