

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	


SERIES SPECIFICATIONS

LXP SERIES

The LXP slim series thermoplastic LED exit sign offers a modern look with long lamp life, energy efficiency and uniform illumination; all components feature a snap-fit construction for speed and ease of installation.



LINE DRAWING

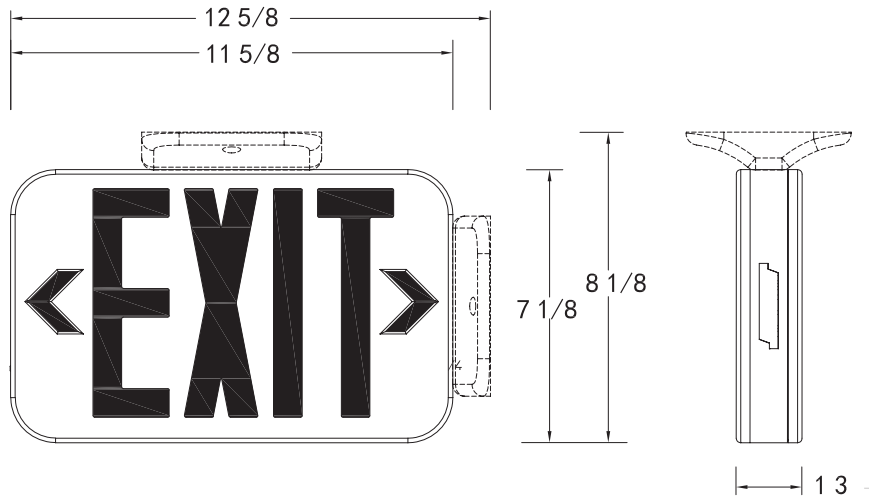

CONSTRUCTION

Housing
Injection molded, engineering grade, UL-stabilized, UL94-0, high impact resistant thermoplastic

Transfer switch
Internal solid-state transfer switch automatically connects the internal battery to lamp heads

Chevrons
Easy snap out chevron directional indicators

Remote Capacity*
3.4W

Illumination
Energy saving, long life, LED Red or Green letters

Charger
Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Remote Compatibility*
LSRH1 and LSRH2 - 3.6 Series



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ELECTRICAL SPECIFICATIONS

Battery Type
Rechargeable NiCad

Emergency Illumination
Minimum 90 Minutes

Battery Recharge Time
24 Hours

Low Voltage Disconnect
Prevents battery from deep
discharge

LED Indicator
Charge rate/power "ON" and
push to test switch

Battery Discharge Time
1.5 Hours

Operating Voltage
120/277

AMPERAGE/WATTAGE

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
LXP-RED	1.78	1.88	0.019	0.009
LXP-GREEN	1.49	1.57	0.019	0.009

MOUNTING SPECIFICATIONS

Includes backplate with universal
mounting pattern knockouts for
simple back mounting

Quick install snap-fit canopy and
mounting hardware for easy top or
end mount.

Suitable for top, back, or side
mount applications

Options

RC
Remote capable option will run up to (2) 3.6V LED
remote heads for a minimum of 90 minutes

SD
Self Diagnostic Option automatically tests the PCB
Board, Battery and Lamp periodically through a series of
self tests done Monthly, Bi-Annually and Annually.

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

CERTIFICATIONS/WARRANTY

Listing
UL Listed

Compliance
Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Location Rating:
Suitable for damp locations

Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

ORDERING INFORMATION

Part Number: LXP

LXP	3			EM	
SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
LXP	[3] Universal Single and Double Face	[G] : Green	[W] : White	[EM] : Battery Backup Standard	[BLANK] : No Options
		[R] : Red	[B] : Black		[RC] : Remote Capable
					[SD] : Self Diagnostic

REMOTE COMPATIBILITY CHART

Use the below charts to pick the correct voltage for your remote capable device.

REMOTE COMPATIBILITY CHART

SERIES	ESRH SERIES		LSRH SERIES (LED)		
	6V	12V	3.6V	9.6V	MULTI
ESLFX-2				X	X
LXP-RC			X		X
LXPC-RC			X		X
EXDC-RC			X		X
EXWTC-RC			X		X
ESLR-1RC			X		X
LSR-1RC			X		X
ESR-16R-65	X				X
LXPCP-RC				X	X
EXPCL-RC				X	X
ESR-16R-LED	X				X

SERIES	ESRH SERIES		LSRH SERIES (LED)		
	6V	12V	3.6V	9.6V	MULTI
ESR-1HO	X				X
LSDXR627	X				X
ESTFX-2	X				X
ESDXR6	X				X
ESDXRS6	X				X
ESDXR12		X			X
ESDXRS12		X			X
ESR-16R-125		X			X
ESR-16R-LED12		X			X
EXP-RC	X				X
LXWTC-RC			X		X

NOTES

*RC option only

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION