



# TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986  
tel: (772) 878-4944 or on the web at [www.tamliteusa.com](http://www.tamliteusa.com)

## SPECIFICATION & FEATURES

Catalog #:	08/02/2016
Project:	Type:
Prepared By:	

### DESCRIPTION

The SLXPC series thermoplastic LED exit sign and emergency lighting combination unit that offers long lamp life, energy efficiency and uniform illumination with round LED light heads.

### HOUSING

Injection molded, engineering-grade, UV-stabilized, UL 94V-0 flame rating, high-impact and corrosion-resistant thermoplastic housing  
Easy to install snap-fit faceplate and backplate and includes second faceplate for double face applications  
Has 6" letters with 3/4" stroke width  
The chevron directional indicators can be easily removed or reinserted as necessary comes in red or green letters  
High performance smooth thermoplastic reflector and prismatic plastic lens  
Test switch and AC power indicator light

### ELECTRICAL DETAILS

LVD (low voltage disconnect) prevents battery from deep discharge.  
Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.  
Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.  
Maintenance free, rechargeable, environmentally friendly Ni-Cad battery

### SOURCE/WATTAGE

Dual-voltage input 120 or 277V has charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing  
Red  
120V: .044 Amps, 5.0 Max Watts  
277V: .017 Amps, 4.8 Max Watts  
Green  
120V: .032 Amps, 3.9 Max Watts  
277V: .015 Amps, 3.9 Max Watts

### LAMP

Two high-lumen heads are long lasting, efficient ultra-bright white LEDs  
Long life, energy saving LED lamps, red or green LED/letters

### MOUNTING

Surface mount via "easy connect" backplate, which fits most standard junction boxes  
Snaps into place making internal electrical connections  
Conduit mounts using knockouts on the backplate or on top of housing  
Suitable for wall or ceiling mount

### LISTINGS/RATINGS/COMPLIANCE

Fixtures are UL listed and suitable for damp locations.  
Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, most local and state codes

### WARRANTY

Guaranteed five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

### NOTES

Product performance may vary depending on model and end user environment.

\*\*\* SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE\*\*\*


# SLXPC Series

## Square LED Mini Thermoplastic Combo

### Exit/Emergency Light



### SPECIFICATIONS / DIMENSIONS

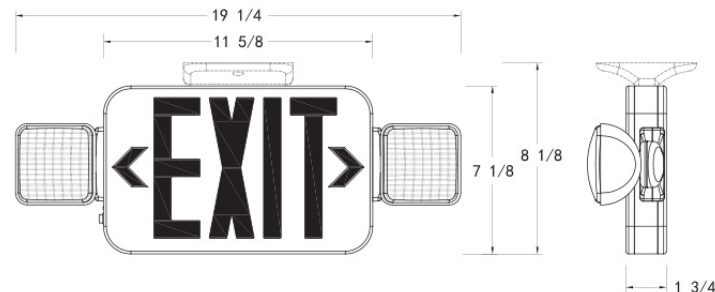

### ORDERING INFORMATION

Sample Part Code: SLXPC3RWEM

SLXPC	3			
SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY
SLXPC	[3]: Universal Single and Double Face	[R]: Red [G]: Green	[W]: White [B]: Black	[EM]: Battery Backup