



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: WLSLEDT

**SERIES SPECIFICATIONS**



**WLSLEDT Series**

The WLSLEDT wraparound offer a shallow design that makes it ideal for general illumination of areas such as hallways/corridors, commercial/educational buildings, and office spaces. The LEDT Series is designed to reduce contractor installation time by adding the tubes at the factory while still keeping the UL listing of the fixture.



**FEATURES & SPECIFICATIONS**

**Input Voltage**

120-277 VAC

**Frequency**

50/60Hz

**Operating Temp**

-20°C ~ 45°C (-4°F ~ 113°F)

**Storage Temp**

-40°C ~ 85°C (-40°F ~ 185°F)

**CRI**

82

**Lamp Shape**

Linear

**Power Factor**

0.9

**Lamp Style**

Linear T8

**Socket Type**

G13 Bi-pin

**Construction**

The body is constructed of 24 gauge, made in USA commercial grade steel with hot dip galvanized finish (6.5µm on both sides). Finish: Paint after fabrication (PAF) of galvanized body adds high resistance to rust over its lifetime.

**Mounting**

Continuous row mounting capability using a chase nipple. This fixture is designed to be surface mounted.

**Listing**

UL listed to US and Canadian safety standards. Damp location listed. Fixtures are Assembled in America.

**Warranty**

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

**Made in the USA**


NOTE: Actual performance may differ as a result of end-user environment and application. All values are designed or typical values, measured under laboratory conditions at 20°C. Specifications subject to change without notice



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: WLSLEDT

**LINE DRAWING**

DIMENSION	L	W	H
2FT	24.25"	7.75"	3.125"
4FT	48.25"	7.75"	3.125"

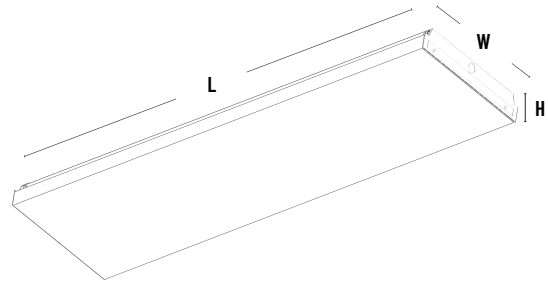

**ORDERING INFORMATION**

Example: WLSLEDT2-9D1L840

SERIES	LENGTH	LAMP WATTAGE	LAMP QTY	LAMPS INCLUDED	LAMP WIRING	OPTIONS
WLSLEDT	[ 2 ] : 2FT [ 4 ] : 4FT	[ Blank ] : No Lamps [ -9 ] : 9W Lamp* [ -18 ] : 18W Lamp**	[ D2 ] : 2 Lamps [ D3 ] : 3 Lamps*** [ D4 ] : 4 Lamps***	[ Blank ] : No Lamps [ L ] : Lamps	[ Blank ] : Single Ended Wiring [ -DE ] : Double Ended Wiring	[ Blank ] : No Options [ -EM ] : Emergency Backup [ -OS ] : Occupancy Sensor [ -W6-3 ] : Flex Whip-6' 3 Wire**** [ -WC6-515 ] : Cord-6' SJ-515 Plug****
					<b>CRI &amp; COLOR TEMP</b>	
					[ 840 ] : 4000K [ 850 ] : 5000K	

\*Option only available on 2 FT fixture.

\*\*\*\* More options available please contact factory.

\*\*Option only available on 4 FT fixture.

\*\*\*D3 and D4 configurations do not allow for row mounting.

**LAMP SPECIFICATIONS**

SERIES	LAMP WATTAGE (PER LAMP)	EFFICACY (PER LAMP)	LAMP OPERATING CURRENT (PER LAMP)	LAMP LUMENS (PER LAMP)	CRI	NUMBER OF LEDS (PER LAMP)
WLSLEDT2	9 Watts	128 lm/W	35-80 mA	1150 lm	82 CRI	44
WLSLEDT4	18 Watts	122 lm/W	65-155 mA	2200 lm	82 CRI	80

**LED TUBES SOLD SEPARATELY**



**WLSLEDT2**

FLED9T8/840/BYPASS • 0308-8620  
FLED9T8/850/BYPASS • 0308-8623



**WLSLEDT4**

FLED18T8/840/BYPASS • 0308-8614  
FLED18T8/850/BYPASS • 0308-8617



APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION