

MODEL :	TYPE
PROJECT :	
PREPARED BY :	DATE :



SERIES SPECIFICATIONS

LXWTC SERIES

The LXWTC series wet location all LED exit & emergency combo features a construction that is ideal for wet locations, while also being resistant to corrosive atmospheres, non-hazardous dust environments, frequent hose-downs, water spray or splashing water.



LINE DRAWING

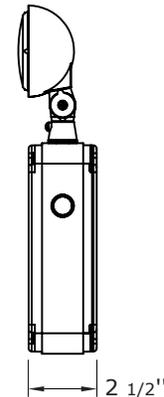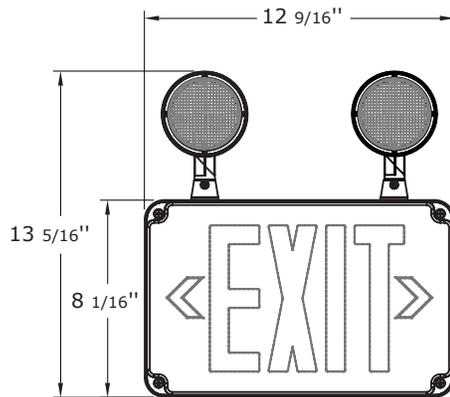

CONSTRUCTION

Housing

5VA flame retardant, high impact resistant, UV stabilized polycarbonate

Lens

Clear

Knockouts

Top and side

Gasket

Engineering grade silicone

Directional Indicators

Removable

Lamp Heads

Two adjustable sealed and gasketed

BATTERY SPECIFICATIONS

Battery Type

3.6V Rechargeable Ni-Cad

Emergency Illumination

Minimum 90 Minutes

Battery Recharge Time

24 Hours

Low Voltage Disconnect

Prevents battery from deep discharge

LED Indicator

Charge rate/power "ON" and push to test switch

Battery Discharge Time

1.5 Hours

MODEL :	TYPE
PROJECT :	
PREPARED BY :	DATE :

ELECTRICAL SPECIFICATIONS CONT.

LED Lamp Heads

1.17W ea.

Operating Voltage

120/277

Color Temp.

Ultra bright white

RC Option

Capable of 3 Watts of 3.6V
remote power

MOUNTING SPECIFICATIONS

Conduit Mount

Mounts using knockouts on the
side or on top of housing

Surface Mount

Backplate fits most
standard junction boxes.

Suitable for wall or ceiling mount

CERTIFICATIONS/WARRANTY

Listing

UL Listed

IP Rating

IP65

Location Rating:

Suitable for wet locations

Safety Requirements

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, most local
and state codes

Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.
Batteries are pro-rated for two years.

ORDERING INFORMATION

Sample Part Number: LXWTC2RW

LXWTC	2		W	
SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
LXWTC	[2] : Universal / Multi Face	[R] : Red	[W] : White	[EM] : Emergency Backup
		[G] : Green		[RC] : Remote Capable