



Catalog #:	08/02/2016
Project:	Type:
Prepared By:	

DESCRIPTION

The SLXPC series thermoplastic LED exit sign and emergency lighting combination unit that offers long lamp life, energy efficiency and uniform illumination with round LED light heads.

HOUSING

Injection molded, engineering-grade, UV-stabilized, UL 94V-0 flame rating, high-impact and corrosion-resistant thermoplastic housing
 Easy to install snap-fit faceplate and backplate and includes second faceplate for double face applications
 Has 6" letters with 3/4" stroke width
 The chevron directional indicators can be easily removed or reinserted as necessary comes in red or green letters
 High performance smooth thermoplastic reflector and prismatic plastic lens
 Test switch and AC power indicator light

ELECTRICAL DETAILS

LVD (low voltage disconnect) prevents battery from deep discharge.
 Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
 Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
 Maintenance free, rechargeable, environmentally friendly Ni-Cad battery

SOURCE/WATTAGE

Dual-voltage input 120 or 277V has charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
 Red
 120V: .044 Amps, 5.0 Max Watts
 277V: .017 Amps, 4.8 Max Watts
 Green
 120V: .032 Amps, 3.9 Max Watts
 277V: .015 Amps, 3.9 Max Watts

LAMP

Two high-lumen heads are long lasting, efficient ultra-bright white LEDs
 Long life, energy saving LED lamps, red or green LED/letters

MOUNTING

Surface mount via "easy connect" backplate, which fits most standard junction boxes
 Snaps into place making internal electrical connections
 Conduit mounts using knockouts on the backplate or on top of housing
 Suitable for wall or ceiling mount

LISTINGS/RATINGS/COMPLIANCE

Fixtures are UL listed and suitable for damp locations.
 Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, most local and state codes

WARRANTY

Guaranteed five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

NOTES

Product performance may vary depending on model and end user environment.

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***


SLXPC Series

Square LED Mini Thermoplastic Combo

Exit/Emergency Light



SPECIFICATIONS / DIMENSIONS

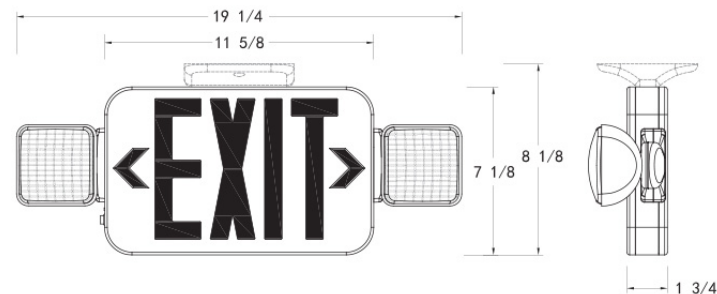

ORDERING INFORMATION

Sample Part Code: SLXPC3RWEM

SLXPC	3			
SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY
SLXPC	[3]: Universal Single and Double Face	[R]: Red [G]: Green	[W]: White	[EM]: Battery Backup