

CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: LXWT SERIES

SERIES SPECIFICATIONS



LXWT SERIES

The LXWT series wet location all LED exit combo features a construction that is ideal for wet locations, while also being resistant to corrosive atmospheres, non-hazardous dust environments, frequent hosedowns, water spray or splashing water.



CONSTRUCTION

Housing Material: Corrosion and impact resistant thermoplastic housing

Gasket: Engineering grade silicone
Knockouts: Top and side

Directional Indicators: Removable
Housing Color: Ultra bright white

ELECTRICAL SPECIFICATIONS

Battery Type: 3.6V Rechargeable Ni-Cad
Low Voltage Disconnect: Prevents battery from deep discharge
Operating Voltage: 120/277V

Emergency Illumination: Minimum 90 minutes
LED Indicator: Charge rate/power "ON" and push to test switch
Battery Recharge Time: 24hrs.

Battery Discharge Time: 1.5hrs.


CERTIFICATIONS/WARRANTY

Listing: UL Listed
IP Rating: IP65 Rated
Safety Requirements: Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, most local and state codes

Location Rating: Suitable for wet locations

Warranty: Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

LINE DRAWINGS

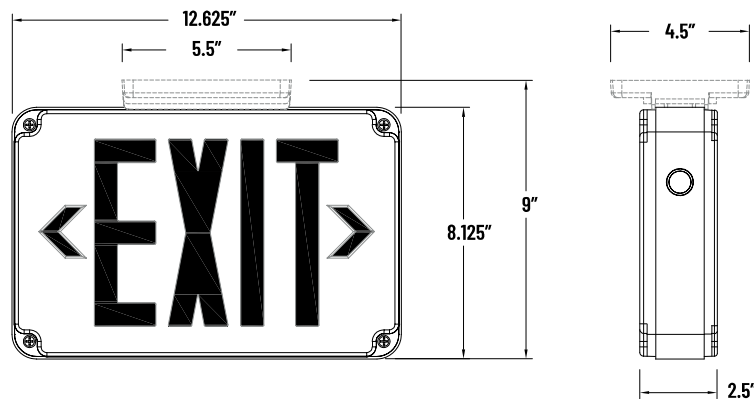



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: LXWT SERIES

ORDERING INFORMATION

Example: LXWT2RWEM

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPERATION
LXWT	[2]: Universal Single or Double Face	[R]: Red [G]: Green	[W]: White	[EM]: Battery Backup

MOUNTING SPECIFICATIONS

Conduit Mount: Mounts using knockouts on the side or on top of housing

Surface Mount: Backplate fits most standard junction boxes

Suitable for wall or ceiling mount.