

CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: LXWT SERIES

## SERIES SPECIFICATIONS



### LXWT SERIES

The LXWT series wet location all LED exit combo features a construction that is ideal for wet locations, while also being resistant to corrosive atmospheres, non-hazardous dust environments, frequent hosedowns, water spray or splashing water.



## CONSTRUCTION

**Housing Material:** Corrosion and impact resistant thermoplastic housing

**Gasket:** Engineering grade silicone  
**Knockouts:** Top and side

**Directional Indicators:** Removable  
**Housing Color:** Ultra bright white

## ELECTRICAL SPECIFICATIONS

**Battery Type:** 3.6V Rechargeable Ni-Cad  
**Low Voltage Disconnect:** Prevents battery from deep discharge  
**Operating Voltage:** 120/277V

**Emergency Illumination:** Minimum 90 minutes  
**LED Indicator:** Charge rate/power "ON" and push to test switch  
**Battery Recharge Time:** 24hrs.

**Battery Discharge Time:** 1.5hrs.


## CERTIFICATIONS/WARRANTY

**Listing:** UL Listed  
**IP Rating:** IP65 Rated  
**Safety Requirements:** Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, most local and state codes

**Location Rating:** Suitable for wet locations

**Warranty:** Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

## LINE DRAWINGS

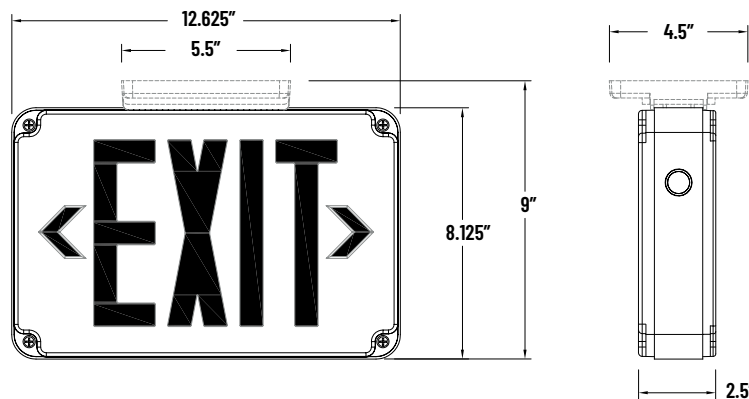



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: LXWT SERIES

## ORDERING INFORMATION

Example: LXWT2RWEM

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPERATION
LXWT	[2]: Universal Single or Double Face	[R]: Red [G]: Green	[W]: White	[EM]: Battery Backup

## MOUNTING SPECIFICATIONS

**Conduit Mount:** Mounts using knockouts on the side or on top of housing

**Surface Mount:** Backplate fits most standard junction boxes

Suitable for wall or ceiling mount.