



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: TRRMSCS2180 SERIES

SERIES SPECIFICATIONS



TRRMSCS2180 SERIES

The TRRMSCS2180 series of color selectable security lights provides an energy efficient way to provide safety and security to your home.



FEATURES & SPECIFICATIONS

Intended Use

LED security floodlights are ideal for entrances, walkways, yards, driveways, and patios.

Construction

The body is constructed of durable polycarbonate and aluminum.

Optics

High density polyethylene lenses provide optimum light while reducing glare.

Electrical

70% lumen maintenance at 40,000hrs. Long-life LEDs, coupled with high-efficiency drivers, provide extended service life. Thermally protected driver standard.

Color Selectable

3000K/4000K/5000K

Input Voltage

120 VAC

Installation

Fixture mounts to a recessed junction box on wall or ceiling. Adjustable heads allow for precision aiming.

Listings



ETL listed to US and Canadian safety standards. Wet location listed. For use in ambient operating temperatures ranging from -20°C to 40°C.

Warranty

3-year limited warranty.

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

LINE DRAWINGS

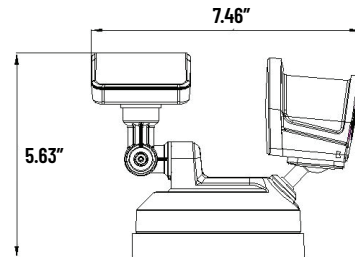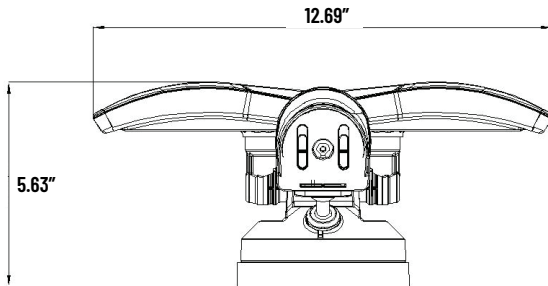

ORDERING INFORMATION

Example: TRRMSCS2180BZ

SERIES	NO. OF HEADS	DETECTION	COLOR
TRRMSCS	[2] : 2 Heads	[180] : 180°	[WH] : White

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: TRRMSC2180 SERIES

PERFORMANCE SPECIFICATIONS

SERIES	LUMENS	LPW	WATTAGE
TRRMSCS	2400lm	75	32W

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION