

| CONTRACTOR:  |               |
|--------------|---------------|
| PROJECT:     | DATE:         |
| PREPARED BY: | MODEL#: TXPCL |

### **SERIES SPECIFICATIONS**



# **TXPCL Series**

# Ultra Thin High Lumen Combo Exit Emergency LED Light

The TXPCL series thermoplastic LED exit sign and emergency lighting combination unit offers long lamp life, energy efficiency and uniform illumination from LED heads







### FEATURES AND SPECIFICATIONS

#### Construction

 $\ensuremath{\mathsf{5VA}}$  flame retardant , high impact resistant thermoplastic in white finish.

#### Installation

Mounting canopy included for top and end mounting.

#### **Electrical**

Dual 120/277 voltage ,LED battery indicator (green=normal, red=check battery)

### **Battery Recharge Time**

24 Hours

#### **Battery Type**

3.6v rechargeable NiCad


#### **Battery Discharge Time**


90 mins

#### Warranty

5-year limited warranty.

# LINE DRAWINGS

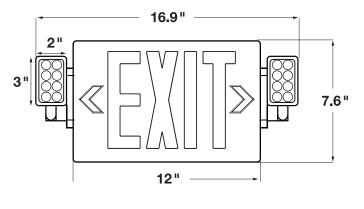





| CONTRACTOR:  |               |
|--------------|---------------|
| PROJECT:     | DATE:         |
| PREPARED BY: | MODEL#: TXPCL |

## ORDERING INFORMATION

**EXAMPLE:** TXPCL3GWEM

| SERIES                                 | NO. OF FACES           | LETTER COLOR | HOUSING COLOR        | BATTERY (ALWAYS INCLUDES EM=EMERGENCY) |
|--|------------------------|--------------|----------------------|--|
| TXPCL [3]: Universal Single/<br>Double | [3]: Universal Single/ | [R]: Red     | Dud was              | (Tul) D. II. D. I                      |
|  | [G]: Green             | [W] : White  | [EM]: Battery Backup |  |