

CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: CH-6

**SERIES SPECIFICATIONS**



**CH-6**

Properly replace commercial-grade recessed downlights with the unbeatable longevity and energy efficiency of LED. The built-in spring clips hold onto drywall directly allowing the CH series to be installed without a frame, making installation faster and more cost effective.




**CONSTRUCTION**

**Housing Material:** Aluminum  
**Mounting Style:** Spring Clips

**LED Driver:** Electronic Driver  
**Lens Material:** Frosted Plastic

**Finish:** White

**LINE DRAWINGS**

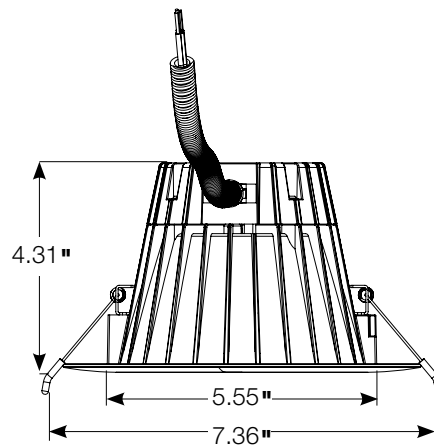

**ELECTRICAL SPECIFICATIONS**

**Input Voltage:** 120-277VAC  
**CRI:** > 80  
**Input Wattage:** 17W  
**Efficacy:** 88+ LM/W  
**Power Factor:** >0.9

**Beam Angle:** 90°  
**Frequency:** 60Hz  
**Dimming:** 0-10%  
**Lifespan:** 50,000hrs.  
**Color Temp.:** 3000K, 4000K, & 5000K

**Min. Starting Temp.:** -25°C  
**THD:** <20%  
**Lumens:** 1500Lm  
**Max. Temp.:** 104°F (40°C)



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: CH-6

## CERTIFICATIONS/WARRANTY

**Listing:** ETL Listed

**Location Rating:** Suitable for wet locations

**Warranty:** Guaranteed five years from the purchase date of the product, against mechanical defects in manufacturing.

## ORDERING INFORMATION

**Example:** CH-6-1730-WH-UZTD

SERIES	SIZE	WATTAGE	COLOR TEMP.	FINISH	DIMMING
CH	[-6]: 6"	[-17]: 17 Watts	[30]: 3000K	[-WH]: White	[-UZTD]: Dimmable
			[40]: 4000K		
			[50]: 5000K		

## COMPATIBLE DIMMER LIST

BRAND	MODEL
Sylvania	45167
Leviton Decora	IP710-LFZ
Lutron Diva	DVSTV-WH
Cooper	DF10P-C1