

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	


SPECIFICATIONS

CSM SERIES

The CSM series of surface mount troffers are designed for general illumination in commercial, industrial, hospital and retail lighting applications. The 3" housing design makes this fixture series a great fit for surface mount lighting applications.



LINE DRAWING

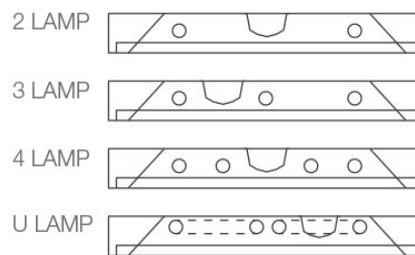

DIMENSIONS(2x2)	L	W	H
2 Lamp	24 "	23 3/4 "	3 "
3 Lamp	24 "	23 3/4 "	3 "
4 Lamp	24 "	23 3/4 "	3 "
U Lamp	24 "	23 3/4 "	3 "

CONSTRUCTION

DESCRIPTION

The CSM series of surface mount troffers are designed for general illumination in commercial, industrial, hospital and retail lighting applications. The 3" housing design makes this fixture series a great fit for surface mount lighting applications.

HOUSING

Hot dipped galvanized uni-body construction with spot-welded corners
 Painted After Fabrication (PAF)- safe handling and added corrosion resistance
 Door frame creates a mechanical light trap as it meets the fixture body
 Raised stand-offs provide even heat dissipation
 All lamps may be installed or removed in any order

ELECTRICAL

ELECTRICAL DETAILS

NEC required ballast disconnect pre-installed

LISTINGS/RATINGS

LISTINGS/RATINGS/COMPLIANCE

Fixtures are UL listed and suitable for damp locations.

WARRANTY

WARRANTY

Guaranteed one year from the purchase date of the product, against mechanical defects in manufacturing.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Sample Part Code: CSM22-417D1P1L741

CSM	22							
SERIES	DIMENSIONS	LAMP QTY	LAMP WATTAGE	VOLTAGE	LENS	LAMPS INCLUDED	OPTION	COLOR
CSM	[22]: 2ft x2ft	[2]: 2 Lamp [3]: 3 Lamp [4]: 4 Lamp	[14]: 14W T5 [17]: 17W T8 [24]: 24W T5HO [32]: 32W U-T8	[D1]: 120-277V (1 ballast) [D2]: 120-277V (2 ballast) [DPRS1]: 120-277V Program Rapid Start [SDIM1]: 120-277V Step Dimming* [D1MK7]: 120-277V 0-10V Elec. Dimming* [A1MK10]: 120V Line Voltage Dimming* [B1MK10]: 277V Line Voltage Dimming* [DL1]: 0.77 Low Ballast Factor 120-277V [DH1]: 1.18 High Ballast Factor 120-277V	[P1]: Pattern 12 .095 [P2]: Pattern 12 .125 [P3]: Pattern 12 .156 [P4]: Drop Dish 1 1/2" [E1]: 1/2" x 1/2" Specular [E2]: 1 1/4" x 1 1/4" Specular [LC1]: S80 Clear Acrylic [C09]: 9 Cell Shallow Semi-Specular Louver	[BLANK]: No Lamps [L735]: CRI±70 3500K [L741]: CRI±70 4100K [L750]: CRI±70 5000K [L835]: CRI±80 3500K [L841]: CRI±80 4100K [L850]: CRI±80 5000K [L850HL]: CRI±80 5000K High Lumen [L865]: CRI±80 6500K [L950]: CRI±90 5000K	[BLANK]: No Options [W1]: 6ft Flex (1 cir.) [W2]: 6ft Flex (2 cir.) [B1]: Emerg. 500 Lum. 1 Lamp [B2]: Emerg. 1400 Lum. 1 Lamp [B3]: Emerg. 1400 Lum. 2 Lamp [R]: Specular Alum. Back Ref. [F]: Fused	[BLANK]: Std. White [B]: Stealth Black