



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

SERIES SPECIFICATIONS



CXP Series

The CXP series compact exit sign offers long-life, energy efficient and uniform illumination. All components feature a snap-fit construction for speed and ease of installation.



CONSTRUCTION

Housing

Injection-molded, engineering grade, 5VA flame retardant, high-impact thermoplastic

Transfer switch

Internal solid-state transfer switch automatically connects the internal battery to lamp heads

Chevrons

Easy snap-out chevron directional indicators.

Charger

Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Illumination

Ultra bright, long life LED

Listing

UL Listed

Location Rating

Suitable for damp locations


Compliance

Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

LINE DRAWINGS

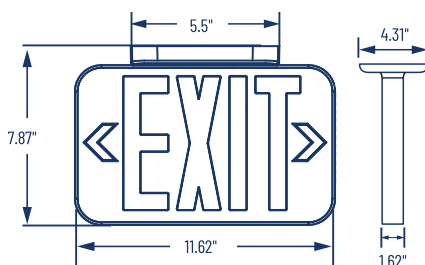

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

ELECTRICAL SPECIFICATIONS

Battery Type

1.2V Rechargeable Ni-CD

Wattage

0.9W

Supply Voltage

A/C 120/277V - 60HZ

Low Voltage Disconnect

Prevents battery from deep discharge

Emergency Illumination

Minimum 90 Minutes

Battery Recharge Time

24 Hours

Operating Voltage

120/277

LED Indicator

Charge rate/power "ON" and push to test switch

MOUNTING SPECIFICATIONS

Easy snap mounting canopy included for top or end mount.

Universal K/O pattern on back plate for wall mount.

ORDERING INFORMATION

EXAMPLE: CXP3RWEM

SERIES	# OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY
CXP	[3] Universal Single and Double Face	[R] : Red [G] : Green	[W] : White	[EM] : Battery Backup