

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

SERIES SPECIFICATIONS


OMX SERIES

500 Lumen LED Emergency Ballast
 Engineered to only work with the following Fusion LED ByPass Lamps :

FLED17T8/8**/DEBPASS
 FLED9T8/8**/DEBPASS
 FLED12.5T8/8**/BYPASS
 FLED9T8/8**/BYPASS
 FLED15T8/8**/BYPASS
 FLED18T8/8**/BYPASS



LINE DRAWING

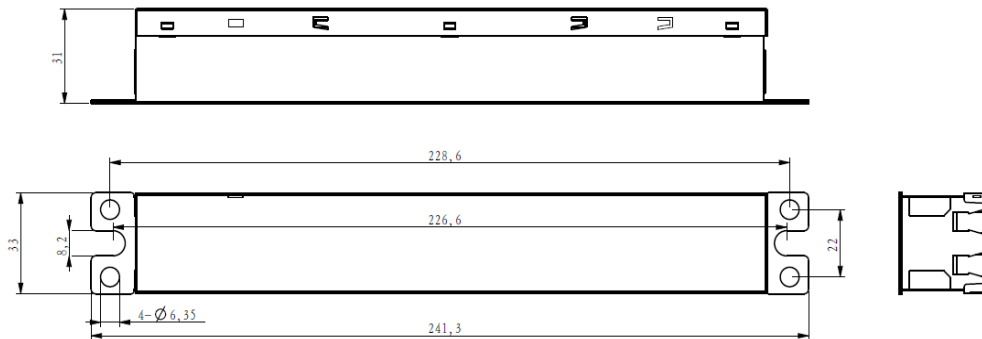

CONSTRUCTION

Housing

Durable compact painted steel construction in RED finish

ELECTRICAL SPECIFICATIONS

Battery Type

800mAh 14.8V Lithium-Ion

Emergency Illumination

Minimum 90 Minutes

Battery Recharge Time

24 Hours

Operating Voltage

120-277

Frequency

50/60Hz

Battery Discharge Time

1.5 Hours @ 5W

Max. Power

5W

Operating Temp.

0°C ~ 45°C

Max. Standby Power

500 Max.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ELECTRICAL SPECIFICATIONS

Output Power
5W

Charge Current
160mA

Output Open Protection
Yes

Over Power Protection
Yes

CERTIFICATIONS/WARRANTY

Listing

UL Listed for factory or field installation

Compliance

Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Location Rating:

Suitable for damp locations.

Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

ORDERING INFORMATION

Sample Part Number: LMX500

LMX	500
SERIES	LUMENS
LMX	[500] : 500 Lumens

WIRING DIAGRAM

