



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	

DESCRIPTION



TRR SQ RF Series

These LED Retrofit Kits are compatible with most recessed cans. The TRR series is designed with a white baffle construction, and dimmable LED driver rated for 50,000 hours. Suitable for IC and Non-IC housings.



PHYSICAL SPECIFICATIONS

Housing Material: Plastic

Color: White

Dimming Percentage: 10%-100%

Ambient Temperature: -20°C (-4°F) - +40°C (+104°F)



Mounting Type: Recessed Housing

Lens/ Optic Material: Polycarbonate



Dimming Type: Triac

LINE DRAWING

TRR4RFSQ

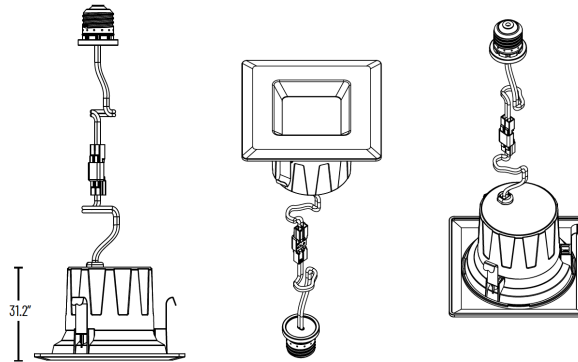

TRR56RFSQ

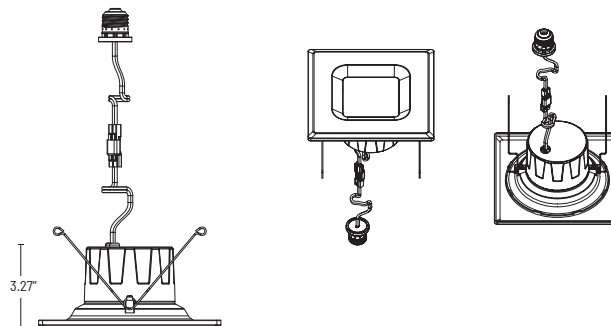

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	

ORDERING INFORMATION

EXAMPLE: TRR4SQRF-3

SERIES	SIZE	STYLE	TYPE	COLOR TEMP.
TRR	[4] : 4"*** [56] : 5/6"***	[SQ] : Square	[RF] : Retrofit	[-3] : 3000K
				[-4] : 4000K
				[-5] : 5000K

The TRR4SQRF comes with 3 tension clips. Compatible with most 4" recessed cans.*
The TRR56SQRF comes with 2 torsion clips. Compatible with most 5" and 6" recessed cans.**

TECHNICAL SPECS

SPECS	TRR4RFSQ	TRR56RFSQ
Input Voltage	120V	
Input Power	9W	13W
Lumens	600lm (3000K)	900lm (3000K)
Operating temperature	From -20° to +40°	
Frequency	60 Hz	
CRI	90	
LED Lifespan	50,000 HRS	
Dimmable	10-100%*	